


FORM PTO-1390 (REV 10-2000)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEYS DOCKET NUMBER 0819-470
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371			U.S. APPLICATION NO. (If known, specify Chapter 1 or 2) 09/719051
INTERNATIONAL APPLICATION NO PCT/JP00/02308	INTERNATIONAL FILING DATE April 7, 2000	PRIORITY DATE CLAIMED April 8, 1999	
TITLE OF INVENTION IMAGE PROCESSING METHOD AND IMAGE PROCESSING APPARATUS			
APPLICANT(S) FOR DO/EO/US Satoshi KONDO			
<p>Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:</p> <ol style="list-style-type: none"> <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. <input checked="" type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. <input checked="" type="checkbox"/> This is an express request to promptly begin national examination procedures (35 U.S.C. 371(f)). <input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (PCT Article 31). <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) <ol style="list-style-type: none"> <input type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau). <input checked="" type="checkbox"/> has been communicated by the International Bureau. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). <input checked="" type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)). <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)). <ol style="list-style-type: none"> <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau). <input type="checkbox"/> have been communicated by the International Bureau. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. <input checked="" type="checkbox"/> have not been made and will not be made. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). <input type="checkbox"/> An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). <p>Items 11 to 16 below concern document(s) or information included:</p> <ol style="list-style-type: none"> <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. <input checked="" type="checkbox"/> A FIRST preliminary amendment. <ul style="list-style-type: none"> <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. <input type="checkbox"/> A substitute specification. <input type="checkbox"/> A change of power of attorney and/or address letter. <input checked="" type="checkbox"/> Other items or information: International Search Report 24 sheets of formal drawings 			

U.S. APPLICATION NO. 09/719051 INTERNATIONAL APPLICATION NO. PCT/JP00/02308		ATTORNEY'S DOCKET NUMBER 0819-470					
17. <input checked="" type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492(a)(1) - (5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO..... #1000.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the PO or JPO \$860.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(3)) paid to USPTO \$710.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4)..... \$690.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00 ENTER APPROPRIATE BASIC FEE AMOUNT =		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 50%;">CALCULATIONS</th> <th style="width: 50%;">PTO USE ONLY</th> </tr> <tr> <td style="height: 100px;"></td> <td></td> </tr> </table>		CALCULATIONS	PTO USE ONLY		
CALCULATIONS	PTO USE ONLY						
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).		\$					
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE				
Total claims	64 - 20 =	44	X \$18.00				
Independent claims	12 - 3 =	9	X \$80.00				
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$270.00				
TOTAL OF ABOVE CALCULATIONS =			\$2,372.00				
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.			\$				
SUBTOTAL =			\$2,372.00				
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).			\$				
TOTAL NATIONAL FEE =			\$2,372.00				
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property			+				
TOTAL FEES ENCLOSED =			\$2,682.00				
			Amount to be refunded: \$				
			charged: \$				
a. <input checked="" type="checkbox"/> A check in the amount of \$2,412.00 to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$_____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 19-2380. A duplicate copy of this sheet is enclosed. NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status. SEND ALL CORRESPONDENCE TO							
 SIGNATURE <u>Eric J. Robinson</u> NAME <u>38,285</u> REGISTRATION NUMBER							

09/719051

JCO1 Rec'd PCT/PTO 07 DEC 2000

- 1 -

Docket No. 0819-470

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of)
Satoshi KONDO)
International Application No. PCT/JP00/02308) Attn: Applications
International Filing Date: April 7, 2000) Branch
For: IMAGE PROCESSING METHOD)
AND IMAGE PROCESSING)
APPARATUS) Date: December 7, 2000

PRELIMINARY AMENDMENT

Honorable Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Please preliminarily amend the subject application as follows:

IN THE SPECIFICATION:

Please amend the specification as follows:

Page 37, line 13, after "vector" insert --estimating--.

Page 47, line 9, delete "320" and insert --220--.

Page 48, line 8, delete "310" and insert --330--;

line 20, delete "MVH1" and insert --MBH1-- and delete "MVH4" and
insert --MBH4--; and

line 23, delete "MVH1" and insert --MBH1-- and delete "MVH4" and insert --MBH4--.

Page 49, line 6, delete "33" and insert --330--.

Page 53, line 15, delete "coding" and insert --processing--.

REMARKS

The specification has been amended to correct informalities therein.

Examination on the merits is requested.

Respectfully submitted,



Eric J. Robinson
Registration No. 38,285

NIXON PEABODY LLP
8180 Greensboro Drive, Suite 800
McLean, Virginia 22102
(703) 790-9110

DESCRIPTION

IMAGE PROCESSING METHOD AND IMAGE PROCESSING APPARATUS

5

TECHNICAL FIELD

The present invention relates to image processing technology utilizing resolution conversion for a video signal that has been encoded by a high-efficiency compression coding method complying with the MPEG-2, for example.

10

BACKGROUND ART

In recent years, the MPEG-2 (Moving Picture Experts Group-2) standard has been widely used as a high-efficiency compression coding method applicable to transmitting or recording a video signal. According to the MPEG-2 standard, video frames (or fields) are encoded by classifying them into the three picture types of I-, P- and B-pictures. Intra-frame coding is performed on an I-picture. Inter-frame forward predictive coding is performed on a P-picture by using an I- or P-picture, which is ahead of a current picture on the time axis, as a reference frame. And inter-frame bidirectionally predictive coding is performed on a B-picture by using I- and/or P-pictures, which are ahead of and behind the current picture on the time axis, as respective reference frames.

25

Motion compensation is utilized in predictively coding P-

and B-pictures. According to the MPEG-2, motion compensation is performed on a so-called "macroblock" (consisting of 16×16 pixels) basis. In general, a block matching technique, by which a block with the highest correlation is found in a reference frame, is used in estimating a motion vector for the motion compensation purposes.

Hereinafter, known image processing techniques utilizing resolution conversion will be described.

FIG. 22 is a block diagram for a known image processing apparatus that performs MPEG-2 decoding, resolution conversion and MPEG-2 encoding. In FIG. 22, an encoded stream **CSA** is decoded by an MPEG-2 decoder 510 to be an original video signal **SHR** with a high resolution. The original video signal **SHR** is converted by a resolution converter 520 into a new video signal **SLR** with a low resolution. The new video signal **SLR** is encoded by an MPEG-2 encoder 530 in compliance with the MPEG-2 so as to be output as an encoded stream **CSB**.

If the original video signal **SHR** is an interlaced signal, then the resolution converter 520 usually performs the conversion on a field-by-field basis. This is because if the resolution conversion is performed on a frame structure as a whole, then the resolution will increase in a still-picture portion of the frame as compared to the resolution performed on a field structure, but a moving-picture portion thereof cannot be converted appropriately.

FIG. 23 illustrates how resolution conversion may be performed on a pair of fields without changing the structure thereof. As shown in FIG. 23, a first field of a new video signal is generated from a first field of an original video signal, and a second field of the new video signal is generated from a second field of the original video signal.

According to another proposed method, motion estimation is carried out before resolution conversion to find still- and moving-picture portions and then the resolution conversion is performed on the still- and moving-picture portions using the frame and field structures, respectively.

FIG. 24 illustrates two methods of resolution conversion. In FIG. 24, (a) illustrates an image corresponding to an original video signal with a high resolution; (b) illustrates a letterbox image with a low resolution obtained by converting the original video signal shown in (a); and (c) illustrates a squeeze image with a low resolution obtained by converting the original video signal shown in (a). In FIG. 24(a), the aspect ratio of the original video signal is supposed to be 16:9. The aspect ratio of the new video signals is supposed to be 4:3. As for the letterbox image shown in FIG. 24(b), the entire original image has been downscaled at the same ratio both vertically and horizontally and data in the shape of black bands has been added to the top and bottom of the image. As for the squeeze image shown in FIG. 24(c) on the other hand,

the original image has been downscaled at a ratio vertically and at a different ratio horizontally. That is to say, the aspect ratio of the image shown in FIG. 24(c) is 4:3.

5 *Problems to be Solved*

The prior art described above, however, has the following drawbacks.

Firstly, if motion estimation is performed before resolution conversion, then a huge amount of processing is needed
10 for the motion estimation, thus increasing the amount of hardware or software required.

Secondly, as for the configuration shown in FIG. 22, the MPEG-2 encoder 530 should perform normal MPEG-2 encoding processing completely to generate the encoded stream CSB that
15 is just different in resolution from the encoded stream CSA. Thus, the amount of processing will also increase, so the amount of hardware or software required rises, too.

Furthermore, no matter whether the new video signal SLR should be represented as a letterbox image or squeeze image,
20 the MPEG-2 encoder 530 always applies the same encoding method thereto and cannot make full use of the characteristics of a particular resolution conversion method.

DISCLOSURE OF INVENTION

25 An object of the present invention is realizing image

processing utilizing resolution conversion with the amount of processing reduced.

Specifically, an inventive image processing method includes: a decoding step, in which an encoded stream, obtained
5 by encoding an original video signal with a first resolution, is decoded and in which an encoding parameter is extracted from the encoded stream; and a resolution converting step, in which a characteristic of the original video signal is identified by the encoding parameter and in which the original video
10 signal decoded is converted into a new video signal with a second resolution by a resolution conversion method associated with the characteristic.

And in the resolution converting step, a motion characteristic of a picture represented by the original video signal
15 is preferably identified as the characteristic of the original video signal. Furthermore, the encoding parameter preferably includes at least one of: a motion vector representing a quantity of motion of a video unit; a type of orthogonal transformation to be performed using either a frame structure or a
20 field structure; and a mode of motion compensation to be performed using either the frame structure or the field structure.

Also, in the resolution converting step, a picture represented by the original video signal decoded is preferably
25 divided into a still area and a moving area by using the en-

coding parameter, and the original video signal is preferably converted into the new video signal with mutually different resolution conversion methods applied to the still and moving areas. And the original video signal is preferably an inter-
5 laced signal. The resolution conversion is preferably performed on the still area on a frame basis, while the resolution conversion is preferably performed on the moving area on a field basis. Furthermore, the encoding parameter is preferably a motion vector representing a quantity of mo-
10 tion of a video unit, and the area division is preferably carried out based on a result of comparison between the absolute value of the motion vector and a predetermined value.

An inventive image processing apparatus includes: a video decoder for decoding an encoded stream, obtained by en-
15 coding an original video signal with a first resolution, and for extracting an encoding parameter from the encoded stream; and a resolution converter, which receives the original video signal and the encoding parameter that have been output from the video decoder, identifies a characteristic of the original
20 video signal by the encoding parameter and converts the original video signal into a new video signal with a second resolution by a resolution conversion method associated with the characteristic.

And the resolution converter preferably identifies a mo-
25 tion characteristic of a picture represented by the original

video signal as the characteristic of the original video signal. Furthermore, the encoding parameter preferably includes at least one of: a motion vector representing a quantity of motion of a video unit; a type of orthogonal transformation to
5 be performed using either a frame structure or a field structure; and a mode of motion compensation to be performed using either the frame structure or the field structure.

Also, the resolution converter preferably includes: an area dividing section for dividing a picture represented by
10 the input original video signal into a still area and a moving area by using the encoding parameter; a still-area resolution converting section for converting a video signal representing the still area, which has been output from the area dividing section, into the video signal with the second
15 resolution; and a moving-area resolution converting section for converting a video signal representing the moving area, which has been output from the area dividing section, into the video signal with the second resolution. Furthermore, the original video signal is preferably an interlaced signal,
20 the still-area resolution converting section preferably performs the resolution conversion on a frame basis, and the moving-area resolution converting section preferably performs the resolution conversion on a field basis. Furthermore, the encoding parameter is preferably a motion vector representing
25 a quantity of motion of a video unit, and the area dividing

section preferably performs the area division based on a result of comparison between the absolute value of the motion vector and a predetermined value.

Another inventive image processing method includes: a
5 decoding step, in which an encoded stream, obtained by encoding an original video signal with a first resolution, is decoded and in which a motion vector is extracted from the encoded stream; and a resolution converting step, in which the original video signal decoded is converted into a new video
10 signal with a second resolution by using the motion vector extracted.

And the resolution converting step preferably includes an area dividing step, in which a picture represented by the original video signal decoded is divided into a quasi-still
15 area and a moving area by using the motion vector extracted. The resolution is preferably converted into that of the new video signal by using the extracted motion vector for the quasi-still area and without using the extracted motion vector for the moving area.

20 And in the area dividing step, pixel-by-pixel motion vectors with directions similar to that of the extracted motion vector are preferably estimated from the extracted motion vector. An area, in which the pixel-by-pixel motion vectors have been estimated, is preferably regarded as the
25 quasi-still area, while an area, in which none of the vectors

has been estimated, is preferably regarded as the moving area. Furthermore, in the quasi-still area, the resolution is preferably converted into that of the new video signal by using the pixel-by-pixel motion vectors estimated.

5 Also, in the area dividing step, an area, in which the absolute value of the extracted motion vector is less than a predetermined threshold value, is preferably regarded as the quasi-still area. On the other hand, an area, in which the absolute value is greater than the threshold value, is preferably regarded as the moving area.

10

Another inventive image processing apparatus includes: a video decoder for decoding an encoded stream, obtained by encoding an original video signal with a first resolution, and for extracting a motion vector from the encoded stream; and a resolution converter, which receives the original video signal and the motion vector that have been output from the video decoder and converts the original video signal into a new video signal with a second resolution by using the motion vector.

15

And the resolution converter preferably includes: an area dividing section, which receives the original video signal and the motion vector and divides a picture represented by the original video signal into a quasi-still area and a moving area by using the motion vector; a quasi-still-area resolution converting section for converting a video signal representing the quasi-still area, which has been output from the area di-

20

25

viding section, into the video signal with the second resolution by using the motion vector; and a moving-area resolution converting section for converting a video signal representing the moving area, which has been output from the area dividing
5 section, into the video signal with the second resolution without using the motion vector.

Also, the area dividing section preferably includes a motion vector estimating section for estimating, from the motion vector, pixel-by-pixel motion vectors with directions
10 similar to that of the motion vector. An area, in which the pixel-by-pixel motion vectors have been estimated by the motion vector estimating section, is preferably regarded as the quasi-still area, while an area, in which none of the vectors has been estimated, is preferably regarded as the moving
15 area. Furthermore, the quasi-still-area resolution converting section preferably converts the resolution by using the pixel-by-pixel motion vectors estimated by the motion vector estimating section.

Moreover, the area dividing section preferably regards
20 an area, in which the absolute value of the motion vector is less than a predetermined threshold value, as the quasi-still area, and an area, in which the absolute value is greater than the threshold value, as the moving area.

Still another inventive image processing method includes
25 the steps of: decoding a first encoded stream, obtained by en-

coding an original video signal with a first resolution, and extracting a first encoding parameter from the first encoded stream; converting the original video signal decoded into a new video signal with a second resolution; changing the first
5 encoding parameter into a second encoding parameter for use in encoding the new video signal; and encoding the new video signal using the second encoding parameter, thereby generating a second encoded stream.

00719051 120700
And in the step of changing the encoding parameters, the
10 first encoding parameter, which has been used to encode a first area of a picture represented by the original video signal, is preferably changed into the second encoding parameter, which will be used to encode a second area of a picture represented by the new video signal. The second area preferably
15 bly includes part of the picture represented in the first area.

And the first and second encoding parameters are preferably motion vectors. Furthermore, in the step of changing the encoding parameters, a value (e.g., a weighted average),
20 which has been obtained by performing a predetermined arithmetic operation on the motion vectors of the first area, is preferably regarded as the motion vector of the second area.

Also, the first and second encoding parameters preferably each represent a type of orthogonal transformation to be
25 performed using either a frame structure or a field struc-

ture.

Still another inventive image processing apparatus includes: a video decoder for decoding a first encoded stream, obtained by encoding an original video signal with a first resolution, and for outputting a first encoding parameter from the first encoded stream; a resolution converter for converting the original video signal, which has been output from the video decoder, into a new video signal with a second resolution; an encoding parameter changer for changing the first encoding parameter, which has been output from the video decoder, into a second encoding parameter for use in encoding the new video signal; and a video encoder for encoding the new video signal output from the resolution converter by using the second encoding parameter output from the encoding parameter changer, thereby generating a second encoded stream.

And the encoding parameter changer preferably changes the first encoding parameter, which has been used to encode a first area of a picture represented by the original video signal, into the second encoding parameter, which will be used to encode a second area of a picture represented by the new video signal. The second area preferably includes part of the picture represented in the first area.

And the first and second encoding parameters are preferably motion vectors. Furthermore, the encoding parameter changer preferably regards a value (e.g., a weighted average)

which has been obtained by performing a predetermined arithmetic operation on the motion vectors of the first area, as the motion vector of the second area.

Also, the first and second encoding parameters preferably each represent a type of orthogonal transformation to be performed using either a frame structure or a field structure.

Yet another inventive image processing method includes the steps of: decoding a first encoded stream, obtained by encoding an original video signal with a first resolution, and extracting a first motion vector from the first encoded stream; converting the original video signal decoded into a new video signal with a second resolution; defining setting information based on the first motion vector to estimate a second motion vector for use in encoding the new video signal; estimating the second motion vector in accordance with the setting information defined; and encoding the new video signal using the second motion vector estimated, thereby generating a second encoded stream.

And an initial value of the second motion vector is preferably determined as the setting information. Alternatively, a search range in which the second motion vector is estimated is preferably determined as the setting information.

Yet another inventive image processing apparatus in-

09719051 "120700
cludes: a video decoder for decoding a first encoded stream,
obtained by encoding an original video signal with a first
resolution, and for extracting a first motion vector from the
first encoded stream; a resolution converter for converting
5 the original video signal, which has been output from the
video decoder, into a new video signal with a second resolu-
tion; a motion compensation setter for generating setting in-
formation based on the first motion vector, which has been
output from the video decoder, to estimate a second motion
10 vector for use in encoding the new video signal; and a video
encoder for estimating the second motion vector in accordance
with the setting information generated by the motion compensa-
tion setter and encoding the new video signal, which has been
output from the resolution converter, using the second motion
15 vector estimated, thereby generating a second encoded stream.

And the motion compensation setter preferably determines
an initial value of the second motion vector as the setting
information. Alternatively, the motion compensation setter
preferably determines a search range, in which the second mo-
20 tion vector is estimated, as the setting information.

Yet another inventive image processing method includes:
converting an original video signal having a first resolution
into a new video signal having a second resolution and a
black-level area in part of its picture; encoding the new
25 video signal except the black-level area thereof, thereby

generating a first encoded stream; and combining a second encoded stream, obtained by encoding the black-level area of the video signal, with the first encoded stream, thereby generating an encoded stream for the new video signal.

5 An alternative inventive image processing method includes: converting an original video signal having a first resolution into part of a new video signal, the new video signal having a second resolution and a black-level area in the other part of its picture; encoding the video signal,
10 thereby generating a first encoded stream; and combining a second encoded stream, obtained by encoding the black-level area of the video signal, with the first encoded stream, thereby generating an encoded stream for the new video signal.

Yet another inventive image processing apparatus includes:
15 a resolution converter for converting an original video signal having a first resolution into a new video signal having a second resolution and a black-level area in part of its picture; and a video encoder for encoding the new video signal except the black-level area thereof to generate
20 a first encoded stream and combining a second encoded stream, obtained by encoding the black-level area of the video signal, with the first encoded stream, thereby generating an encoded stream for the new video signal.

 An alternative inventive image processing apparatus includes:
25 a resolution converter for converting an original

video signal having a first resolution into part of a new video signal, the new video signal having a second resolution and a black-level area in the other part of its picture; and a video encoder for encoding the video signal to generate a first encoded stream and combining a second encoded stream, obtained by encoding the black-level area of the video signal, with the first encoded stream, thereby generating an encoded stream for the new video signal.

BRIEF DESCRIPTION OF DRAWINGS

FIG. 1 is a block diagram illustrating an overall configuration for an image processing apparatus according to a first embodiment of the present invention.

FIG. 2 is a block diagram illustrating a configuration for the video decoder shown in FIG. 1.

FIG. 3 is a block diagram illustrating a configuration for the resolution converter shown in FIG. 1.

FIGS. 4(a) and 4(b) are schematic representations illustrating how motion may be recognized in the first embodiment of the present invention: FIG. 4(a) illustrates a situation where a motion vector is used as an encoding parameter; and FIG. 4(b) illustrates a situation where a DCT type is used as an encoding parameter.

FIGS. 5(a) through 5(c) are schematic representations illustrating how area division may be carried out according

to the first embodiment of the present invention: FIG. 5(a) illustrates a result of motion recognition; FIG. 5(b) illustrates a still area; and FIG. 5(c) illustrates moving areas.

FIGS. 6(a) and 6(b) are schematic representations illustrating how resolution conversion may be performed according to the first embodiment of the present invention: FIG. 6(a) illustrates a resolution conversion using a frame structure as it is; and FIG. 6(b) illustrates a resolution conversion using field structures as they are.

FIGS. 7(a) through 7(e) are schematic representations illustrating how areas may be combined according to the first embodiment of the present invention.

FIG. 8 is a block diagram illustrating an overall configuration for an image processing apparatus according to a second embodiment of the present invention.

FIG. 9 is a block diagram illustrating a configuration for the resolution converter shown in FIG. 8.

FIG. 10 is a schematic representation illustrating how the motion vector estimating and quasi-still-area resolution converting sections shown in FIG. 9 may operate.

FIG. 11 is a schematic representation illustrating how the moving-area resolution converting section shown in FIG. 9 may operate.

FIG. 12 is a block diagram illustrating another exemplary configuration for the resolution converter shown in

FIG. 8.

FIG. 13 is a block diagram illustrating an overall configuration for an image processing apparatus according to a third embodiment of the present invention.

5 FIGS. 14(a) through 14(c) are schematic representations illustrating how the encoding parameter changer shown in FIG. 13 may operate.

FIG. 15 is a block diagram illustrating a configuration for the video encoder shown in FIG. 13.

10 FIG. 16 is a block diagram illustrating an overall configuration for an image processing apparatus according to a fourth embodiment of the present invention.

FIG. 17 is a block diagram illustrating a configuration for the video encoder shown in FIG. 16.

15 FIGS. 18(a) through 18(c) are schematic representations illustrating how the motion vector calculator shown in FIG. 17 may operate.

FIG. 19 is a block diagram illustrating an overall configuration for an image processing apparatus according to a
20 fifth embodiment of the present invention.

FIGS. 20(a) and 20(b) illustrate an exemplary resolution conversion according to the fifth embodiment of the present invention.

FIG. 21 is a block diagram illustrating a configuration
25 for the video encoder shown in FIG. 19.

FIG. 22 is a block diagram illustrating a configuration for a known image processing apparatus.

FIGS. 23(a) and 23(b) are a schematic representation illustrating how resolution conversion may be performed using field structures.

FIGS. 24(a) through 24(c) illustrate two types of resolution conversion.

BEST MODE FOR CARRYING OUT THE INVENTION

10 (Embodiment 1)

FIG. 1 is a block diagram illustrating an overall configuration for an image processing apparatus according to a first embodiment of the present invention. As shown in FIG. 1, the image processing apparatus according to this embodiment includes video decoder 10 and resolution converter 20. An encoded stream **CS** of an original video signal with a high resolution (i.e., a first resolution) is input. In response, the video decoder 10 decodes the input encoded stream **CS** into the original video signal **SHR**. Not just this decoding, the decoder 10 also extracts an encoding parameter **PAR** from the encoded stream **CS**. The resolution converter 20 converts the decoded original video signal **SHR** into a new video signal **SLR** with a low resolution (i.e., a second resolution) using the encoding parameter **PAR** and then outputs the new video signal.

25 The encoded stream **CS** is herein supposed to have been

00719051.120700
5 encoded in compliance with the MPEG-2. Accordingly, the video decoder 10 is a decoder complying with the MPEG-2 (Moving Picture Experts Group 2) standard. Also, both the original and new video signals **SHR** and **SLR** are herein supposed to be interlaced signals (i.e., interlaced scanning signals).

FIG. 2 is a diagram illustrating an internal configuration for the video decoder 10. As shown in FIG. 2, the video decoder 10 includes variable-length decoding section 11, inverse quantizing section 12, inverse DCT (discrete cosine transform) section 13, frame memory 14, system control section 15, adder 16 and switch 17. The variable-length decoding section 11 also extracts the encoding parameter **PAR**.

Hereinafter, it will be described how the video decoder 10 shown in FIG. 2 operates. The encoded stream **CS** representing one frame has been encoded on a macroblock (consisting of 16×16 pixels) basis. And the macroblocks of the encoded stream **CS** are sequentially input to the video decoder 10 one after another.

The input encoded stream **CS** is variable-length decoded by the variable-length decoding section 11. Part of the output of the variable-length decoding section 11, which is associated with picture data, is input to the inverse quantizing section 12, while the remaining data other than the picture data is sent to the system control section 15. The data delivered from the variable-length decoding section 11 to the

002021 1505T460

output of the inverse DCT section 13) and the reference picture (i.e., the data that has been read out from the frame memory 14) are added together at the adder 16. And the sum is stored as a decoded picture on the frame memory 14. In this manner, the macroblocks are sequentially decoded and stored on the frame memory 14 one after another.

Decoding will also be performed in the same way on the succeeding frames and the results will be sequentially stored on the frame memory 14. It should be noted that if the frame has been intra-frame coded, then the switch 17 will be connected to a so that the output of the inverse DCT section 13 will be stored on the frame memory 14 as it is. Alternatively, if the frame has been inter-frame coded, then the switch 17 will be connected to b. In that case, the output of the inverse DCT section 13 and the reference picture will be added together by the adder 16 and the sum will be stored on the frame memory 14.

The decoded pictures, which have been stored on the frame memory 14 this way, are sequentially output as the original video signal **SHR** with time from the frame memory 14. The encoding parameter **PAR** is also output from the system control section 15.

FIG. 3 is a diagram illustrating an internal configuration for the resolution converter 20. As shown in FIG. 3, the resolution converter 20 includes area dividing section

21, still-area resolution converting section 23, moving-area resolution converting section 24 and area combining section 25. The area dividing section 21 includes picture dividing section 21a and motion recognizing section 21b.

5 Hereinafter, it will be described how the resolution converter 20 shown in FIG. 3 operates. First, the motion recognizing section 21b recognizes the motion characteristic of the picture, represented by the original video signal SHR, using the encoding parameter PAR received. Then, the motion
10 recognizing section 21b distinguishes still and moving areas from each other.

FIG. 4 illustrates how the motion recognizing section 21b recognizes motion. In FIG. 4, (a) illustrates an exemplary motion recognition where a motion vector is used as the
15 encoding parameter PAR, while (b) illustrates another exemplary motion recognition where a DCT type is used as the encoding parameter PAR.

First, it will be described with reference to FIG. 4(a) how the motion may be recognized where a motion vector is
20 used as the encoding parameter PAR. In FIG. 4(a), a frame picture has been divided into multiple macroblocks, each of which is used as a video unit consisting of 16×16 pixels. According to the MPEG-2 standard, a motion vector represents the horizontal and vertical displacement of a macroblock at a
25 step size of 0.5 pixel. In this case, the motion vector is

09719051 120700
compared to a predetermined value and the motion is recog-
nized based on a result of the comparison. For example, if
the absolute value of the motion vector is less than the pre-
determined value, then the macroblock in question is regarded
5 as belonging to the still area. Conversely, if the absolute
value is greater than the predetermined value, then the mac-
roblock in question is regarded as belonging to the moving
area. In FIG. 4(a), the solid black macroblocks belong to
the moving areas, while the open macroblocks belong to the
10 still area.

Next, it will be described with reference to FIG. 4(b)
how the motion may be recognized where a DCT type is used as
the encoding parameter PAR. In FIG. 4(b), a frame picture
has been divided into multiple blocks, each consisting of 8×
15 8 pixels. According to the MPEG-2 standard, DCT is performed
on each block using either a frame structure or a field
structure to obtain the smaller sum of differences between
vertically adjacent pixels. As used herein, the DCT type
means the type of the structure the DCT operation has been
20 performed with. In the illustrated example, if the DCT type
is the frame structure, then the block in question is regard-
ed as belonging to the still area. Conversely, if the DCT
type is the field structure, then the block in question is
regarded as belonging to the moving area. In FIG. 4(b), the
25 solid black blocks belong to the moving areas, while the open

blocks belong to the still area.

The motion recognizing section 21b performs the motion recognition in this manner and passes its result to the picture dividing section 21a. In accordance with the result of
5 motion recognition obtained from the motion recognizing section 21b, the picture dividing section 21a divides a frame picture into the still and moving areas.

FIG. 5 illustrates schematic representations showing an exemplary area division. In FIG. 5, (a) illustrates the result of motion recognition shown in FIG. 4(a); (b) illustrates a still area that has been extracted by the area
10 dividing section 21; and (c) illustrates moving areas extracted by the area dividing section 21.

Part of the video data represented by the original video
15 signal **SHR**, which has been classified as the still area, is input to the still-area resolution converting section 23. The other part of the video data, which has been classified as the moving area, is input to the moving-area resolution converting section 24. The still- and moving-area resolution
20 converting sections 23 and 24 perform the resolution conversion by respective methods associated with the input video data.

FIG. 6 illustrates how the resolution of the original video signal **SHR** may be converted into that of the new video
25 signal **SLR** in the still- and moving-area resolution convert-

ing sections 23 and 24. In FIG. 6, columns of pixels vertically arranged are illustrated. Specifically, "○" represents a pixel belonging to a first field, while "△" represents a pixel belonging to a second field. In the example illustrated in FIG. 6, the vertical pixels are reduced by 1/2. In FIG. 6, (a) illustrates a resolution conversion using a frame structure as it is, while (b) illustrates a resolution conversion using field structures as they are.

The still-area resolution converting section 23 performs the resolution conversion using the frame structure as it is. Specifically, as shown in FIG. 6(a), the video data of the first field for the new video signal SLR is generated by using pixels belonging to both the first and second fields of the original video signal SHR. The video data of the second field for the new video signal SLR is also generated by using pixels belonging to both the first and second fields of the original video signal SHR.

On the other hand, the moving-area resolution converting section 24 performs the resolution conversion using the field structures as they are. Specifically, as shown in FIG. 6(b), the video data of the first field for the new video signal SLR is generated only from the pixels belonging to the first field of the original video signal SHR. And the video data of the second field for the new video signal SLR is generated only from the pixels belonging to the second field of the

original video signal **SHR**.

The new video signals, which have been generated by the still- and moving-area resolution converting sections 23 and 24 to represent the still and moving areas, respectively, are
5 output to the area combining section 25. The area combining section 25 combines these new video signals for the still and moving areas with each other, thereby converting the resultant signal into a frame picture and outputting it as a new video signal **SLR**.

10 FIG. 7 illustrates how the area combining section 25 may operate. In FIG. 7, (a) and (b) illustrate the pictures input to the still- and moving-area resolution converting sections 23 and 24, respectively, i.e., the pictures shown in FIGS. 5(b) and 5(c). FIGS. 7(c) and 7(d) illustrate the pictures
15 output from the still- and moving-area resolution converting sections 23 and 24, respectively. The number of pixels has been cut down as a result of the resolution conversion. And the area combining section 25 produces a combined picture such as that illustrated in FIG. 7(e), i.e., the new
20 video signal **SLR**, from the pictures shown in FIGS. 7(c) and 7(d).

As described above, according to this embodiment, an encoded stream of an original video signal is decoded while an encoding parameter is extracted from the encoded stream.
25 Next, the characteristic of the original video signal is rec-

09719054 120700
ognized by the encoding parameter and then the original video
signal is converted into a new video signal by a resolution
converting method associated with the characteristic. In this
manner, the amount of processing, including motion vector cal-
5 culation for resolution conversion purposes, can be reduced
considerably. In addition, a picture, represented by the
original video signal, is classified as still and moving areas
according to the encoding parameter and the resolution conver-
sion is carried out with mutually different methods applied to
10 the still and moving areas. As a result, a new video signal
of quality can be obtained with the amount of processing dras-
tically reduced.

In the foregoing embodiment, motion vectors and DCT
types are used as exemplary encoding parameters **PAR** to recog-
15 nize the motion characteristic of a picture. Alternatively,
any other encoding parameter may also be used. Examples of
other applicable encoding parameters include motion compensa-
tion modes. As used herein, the "motion compensation mode"
represents whether the structure with which motion compensa-
20 tion has been performed is a field structure or frame struc-
ture. In using the motion compensation modes as the encoding
parameters **PAR** of this embodiment, the resolution conversion
may be performed using the field structures for an area with a
motion compensation mode associated with the field structures.
25 And as for an area with a motion compensation mode associated

with the frame structure, the resolution conversion may be performed using the frame structure.

Also, in this embodiment, the resolution conversion is performed using the frame structure for the still area and the field structures for the moving areas, respectively. Alternatively, any other resolution converting method is also applicable.

Moreover, in performing the resolution conversion using the frame or field structures according to this embodiment, each pixel for the new video signal **SLR** is generated from the values of two vertically adjacent pixels for the original video signal **SHR** as shown in FIGS. 6(a) and 6(b). However, any other combination of pixels may be used instead.

Furthermore, in this embodiment, the resolution is halved. Alternatively, the resolution may be cut down at any other ratio.

Furthermore, in this embodiment, an original video signal with a high resolution is converted into a new video signal with a low resolution. However, even if a low-resolution original video signal should be converted into a high-resolution new video signal conversely, the encoding parameters may also be used as in this embodiment.

(Embodiment 2)

FIG. 8 is a block diagram illustrating an overall con-

figuration for an image processing apparatus according to a second embodiment of the present invention. As shown in FIG. 8, the image processing apparatus according to this embodiment includes video decoder 110 and resolution converter 120.

5 An encoded stream **CS** of an original video signal with a low resolution (i.e., a first resolution) is input. In response, the video decoder 110 decodes the input encoded stream **CS** into the original video signal **SLR**. Not just this decoding, the decoder 110 also extracts a motion vector **MV** from the encoded stream **CS**. The resolution converter 120 converts the
10 decoded original video signal **SLR** into a new video signal **SHR** with a high resolution (i.e., a second resolution) using the motion vector **MV** and outputs the new video signal.

The original video signal **SLR** is herein supposed to be
15 an interlaced signal (i.e., interlaced scanning signal), while the new video signal **SHR** is herein supposed to be a progressive signal (i.e., progressive scanning signal)..

The video decoder 110 has basically the same configuration as the video decoder 10 according to the first embodiment. The only difference between these decoders 110 and 10
20 is that the decoder 110 outputs the motion vector **MV**. Thus a detailed description thereof will be omitted herein.

FIG. 9 is a block diagram illustrating an internal configuration for the resolution converter 120. As shown in
25 FIG. 9, the resolution converter 120 includes area dividing

section 121, quasi-still-area resolution converting section 123, moving-area resolution converting section 124, area combining section 125 and frame memory 127. Also, the area dividing section 121 includes motion vector estimating section 121a, motion recognizing section 121b and picture dividing section 121c.

The frame memory 127 stores the input original video signals SLR thereon. Using the motion vector MV output from the video decoder 110, a current field of the original video signal SLR and preceding fields thereof stored on the frame memory 127, the motion vector estimating section 121a estimates a pixel-by-pixel motion vector $MV\alpha$, which has a direction similar to that of the motion vector MV, for the current field and another field temporally close to the current field.

Hereinafter, it will be described with reference to FIG. 10 how the motion vector estimating section 121a operates. FIG. 10 schematically illustrates pixels of three frames n, n+1 and n+2 of the original video signal SLR. In FIG. 10, "O" represents a pixel belonging to the first field of each frame, while "X" represents a pixel belonging to the second field of each frame.

Suppose the first field of the frame n+2 should be converted into a progressive picture (i.e., progressively scanned picture) with a twice higher resolution. And it will be

described how to generate the pixel D (represented by " Δ ") shown in FIG. 10.

In this case, a motion vector A for an area G, including the pixel D to be generated, is used among the motion vectors MV output from the video decoder 110. The motion vector A originates from an area F belonging to the first field of the frame n. And a motion vector E with the same direction as that of the motion vector A is selected from the motion vectors of the field closest to the pixel D, i.e., the second field of the frame n+1.

Then, a more accurate motion vector B for a pixel neighboring the pixel D is selected from motion vectors with directions similar to that of the motion vector E by using the pixels neighboring the pixel D in the first field of the frame n+2 and the pixels in the second field of the frame n+1. That is to say, the pixel D can be regarded as a pixel C that has moved from the second field of the frame n+1 by the motion vector B.

The motion vector estimating section 121a outputs the motion vector B, which has been estimated in this manner, as the pixel-by-pixel motion vector $MV\alpha$ to the motion recognizing section 121b.

Using the motion vector $MV\alpha$ that has been input from the motion vector estimating section 121a, the motion recognizing section 121b distinguishes the quasi-still and moving

areas from each other. In the illustrated embodiment, pixels, for which no pixel-by-pixel motion vectors $MV\alpha$ have been found by the motion vector estimating section 121a, are regarded as belonging to the moving area. On the other hand, 5 pixels, for which the pixel-by-pixel motion vectors $MV\alpha$ have been found, are regarded as belonging to the quasi-still area. The motion recognizing section 121b performs the motion recognition in this manner, and passes the result to the picture dividing section 121c.

10 As used herein, the "quasi-still area" means an area of a picture that can be handled as if it were a still picture by shifting the picture by the quantity of the motion using the pixel-by-pixel motion vector $MV\alpha$ although that area is actually a part of the picture with motion.

15 In accordance with the result of motion recognition obtained from the motion recognizing section 121b, the picture dividing section 121c divides a frame picture into the quasi-still and moving areas. Part of the video data that has been classified as the quasi-still area is input to the quasi-
20 still-area resolution converting section 123, while the other part of the video data classified as the moving area is input to the moving-area resolution converting section 124. The quasi-still-area and moving-area resolution converting sections 123 and 124 perform resolution conversion on the input
25 video data by respective methods.

Hereinafter, it will be described with reference to FIG. 10 how the quasi-still-area resolution converting section 123 performs the resolution conversion. The quasi-still-area resolution converting section 123 performs the resolution conversion using the original video signal SLR, the moving area picture output from the area dividing section 121 and the pixel-by-pixel motion vector $MV\alpha$ output from the motion vector estimating section 121a.

Suppose the first field of the frame $n+2$ should be subjected to the resolution conversion, for example. In this case, since the motion vector B has been estimated as the pixel-by-pixel motion vector $MV\alpha$ for a pixel neighboring the pixel D , the pixel C belonging to the second field of the frame $n+1$ is retrieved from the frame memory 127. And the pixel value thereof is used as the value of the pixel D . In the same way, pixels at other interpolation locations are also generated using the pixel-by-pixel motion vectors $MV\alpha$ that have been estimated by the motion vector estimating section 121a. As a result, the high-resolution video signal is generated.

Hereinafter, it will be described with reference to FIG. 11 how the moving-area resolution converting section 124 performs the resolution conversion. In FIG. 11, "O" represents a pixel for the low-resolution video signal, while "X" represents a pixel generated by interpolation for the high-

resolution video signal. As shown in FIG. 11, the moving-area resolution converting section 124 generates the high-resolution video signal from the pixels in the field of the low-resolution video signal through interpolation. For example, the value of a pixel C for the high-resolution video signal is the same as that of a pixel A for the low-resolution video signal. The value of a pixel D for the high-resolution video signal is obtained from those of the pixels A and B for the low-resolution video signal.

10 The video signals, which have been generated by the quasi-still-area and moving-area resolution converting sections 123 and 124, are input to the area combining section 125. The area combining section 125 combines the input video signals together, thereby outputting the combined signal as a
15 new video signal **SHR**.

This embodiment includes the motion vector estimating section 121a for re-calculating the motion vector $MV\alpha$ on a pixel-by-pixel basis using the motion vector **MV** that has been obtained from the encoded stream **CS** of the original video
20 signal **SLR**. Alternatively, the area division may also be carried out using the value of the estimated motion vector **MV** as it is.

FIG. 12 is a diagram illustrating a configuration for a resolution converter 120A for such an alternative embodiment.
25 In FIG. 12, the area dividing section 122 includes a motion

recognizing section 122a for recognizing the motion based on the motion vector **MV** directly and a picture dividing section 122b. In this case, the area division may be carried out with a pixel regarded as belonging to the quasi-still area if the absolute value of the motion vector **MV** is less than a predetermined threshold value or as belonging to the moving area if the absolute value is greater than the threshold value, for example. Also, a pixel may be regarded as belonging to the moving area only when the absolute value of the motion vector **MV** is very great. Furthermore, the resolution conversion may be carried out while regarding the entire area as the quasi-still area and using the value of the motion vector **MV** as it is.

As described above, according to this embodiment, an encoded stream of an original video signal is decoded while a motion vector is extracted from the encoding stream. Then, a new video signal is generated through resolution conversion using the motion vector extracted. In this manner, the amount of processing, including motion vector calculation for resolution conversion purposes, can be reduced considerably. In addition, quasi-still and moving areas of a picture represented by the original video signal are distinguished by the motion vector and the resolution conversion is carried out on the quasi-still area using the motion vector. Thus, the amount of processing, including motion vector calculation carried out to

convert the resolution for the quasi-still area, can be cut
down significantly. Furthermore, the resolution conversion is
performed with mutually different methods applied to the
quasi-still and moving areas. As a result, a new video signal
5 of quality can be obtained with the amount of processing dras-
tically reduced.

In this embodiment, an original video signal with a low
resolution is converted into a new video signal with a high
resolution. However, even if a high-resolution original
10 video signal should be converted into a low-resolution new
video signal conversely, the motion vectors may also be used
as in this embodiment.

Also, in this embodiment, the motion vector section 121a
estimates a motion vector between a current field and a past
15 field, and the quasi-still-area resolution converting section
123 generates an interpolated pixel from pixels belonging to a
preceding field. Alternatively, a motion vector may also be
estimated for a future field and an interpolated pixel may al-
so be generated from pixels belonging to a future field.

20 Moreover, in this embodiment, the moving-area resolution
converting section 124 converts the resolution by generating
interpolated pixels as shown in FIG. 11. Optionally, any
other resolution conversion method is applicable.

Furthermore, in this embodiment, the quasi-still-area re-
25 solution converting section 123 generates an interpolated pix-

el from pixels belonging to the closest, preceding field. Alternatively, an interpolated pixel may also be generated from pixels belonging to a field that is several fields away from the current field.

5

(Embodiment 3)

FIG. 13 is a block diagram illustrating an overall configuration for an image processing apparatus according to a third embodiment of the present invention. As shown in FIG. 10 13, the image processing apparatus according to this embodiment includes video decoder 210, resolution converter 220, video encoder 230 and encoding parameter changer 240.

A first encoded stream **CSA**, which is an encoded stream of an original video signal with a high resolution (i.e., a first resolution), is input. In response, the video decoder 15 210 decodes the input first encoded stream **CSA** into the original video signal **SHR**. Not just this decoding, the decoder 210 also extracts an encoding parameter **PARA** from the first encoded stream **CSA**. The resolution converter 220 converts the original video signal **SHR** into a new video signal 20 **SLR**. The encoding parameter changer 240 changes the first encoding parameter **PARA**, which has been output from the video decoder 210, into a parameter for a video with a low resolution and then outputs it as a second encoding parameter **PARB**. 25 And the video encoder 230 encodes the new video signal **SLR** us-

ing the second encoding parameter **PARB** and then outputs it as a second encoded stream **CSB**.

The first encoded stream **CSA** is herein supposed to have been encoded in compliance with the MPEG-2. Accordingly, the
5 video decoder **210** is a decoder complying with the MPEG-2 standard. The configuration and operation of the video decoder **210** are the same as those of the video decoder **10** according to the first embodiment. Thus, the detailed description thereof will be omitted herein.

10 The resolution converter **220** converts the original video signal **SHR**, which has been decoded by the video decoder **210**, into the new video signal **SLR**. In the illustrated embodiment, the resolution converter **220** cuts down the number of pixels by half both vertically and horizontally.

15 Next, it will be described with reference to FIG. 14 how the encoding parameter changer **240** operates. The encoding parameter changer **240** changes the first encoding parameter **PARA** for the original video signal **SHR** into the second encoding parameter **PARB** for the new video signal **SLR**. Suppose a
20 frame picture of the original video signal **SHR** is converted into a frame picture of the new video signal **SLR** that has had its number of pixels reduced by half both vertically and horizontally as shown in FIG. 14(a).

First, a situation where the encoding parameter to be
25 changed is a motion vector will be described with reference to

FIG. 14(b). In FIG. 14(b), a frame picture is illustrated as having been divided into multiple macroblocks. As shown in FIG. 14(b), an area for macroblocks MBH1, MBH2, MBH3 and MBH4 in the original video signal SHR (i.e., the first area) is
 5 downscaled to an area for a macroblock MBL in the new video signal SLR (i.e., the second area) through the resolution conversion. In this case, a motion vector MVL for the macroblock MBL in the new video signal SLR is supposed to be obtained by averaging weighted motion vectors MVHi of the respective macroblocks MBHi in the original video signal SHR. That is to
 10 say, the motion vector MVL is given by the following Equation (1):

$$MVL = \left\{ \sum_{i=1}^N (Ci \times MVHi) \right\} \times \alpha \quad (1)$$

15

where Ci is a weighting coefficient meeting the following Equation (2):

$$\sum_{i=1}^N Ci = 1 \quad (2)$$

20

where N is the number of macroblocks in the original video signal SHR that are used to estimate the motion vector MVL for the macroblock MBL in the new video signal SLR. In the illustrated example, N is "4". Also, α is a ratio of the number
 25 of pixels representing the picture size of the new video sig-

nal to the number of pixels representing the picture size of the original video signal. Normally, a horizontal α value is different from a vertical α value.

In this case, if the pixel number ratio resulting from the resolution conversion is 1/2 or 1/4, for example, then the boundary between macroblocks after the conversion matches to the boundary between macroblocks before the conversion. Accordingly, the same weighting coefficient C_i value can be used. However, if the pixel number ratio is 1/3 or 2/5, for example, then the boundary between macroblocks after the conversion does not match to the boundary between macroblocks before the conversion. Thus, the macroblocks should be weighted by mutually different weighting coefficient C_i values before the conversion.

Next, a situation where the encoding parameter to be changed is a DCT type (i.e., type of orthogonal transformation) will be described with reference to FIG. 14(c). In FIG. 14(c), a frame picture is illustrated as having been divided into multiple blocks. As shown in FIG. 14(c), an area for blocks BH1, BH2, BH3 and BH4 in the original video signal (i.e., the first area) is downscaled to an area for a block BL in the new video signal (i.e., the second area) through the resolution conversion. In this case, a DCT type for the block BL in the new video signal is obtained by using the DCT types of the respective blocks BH1 through BH4 in the original video

signal. For example, if the DCT types of the blocks **BH1** through **BH4** are all a frame structure, then the DCT type of the block **BL** may also be the frame structure. Or if at least one of the DCT types of the blocks **BH1** through **BH4** is a field structure, then the DCT type of the block **BL** should also be the field structure. Alternatively, the DCT type of the converted block may be defined as the DCT type applied to the greater number of original blocks.

In this manner, the encoding parameter changer 240 changes the first encoding parameter **PARA** for the original video signal **SHR** into the second encoding parameter **PARB** for the new video signal **SLR**.

FIG. 15 is a block diagram illustrating an internal configuration for the video encoder 230. The video encoder 230 shown in FIG. 15 has basically the same configuration as a normal MPEG encoder. However, since a motion vector may be provided as the second encoding parameter **PARB**, the motion estimating section is omitted therefrom. Also, since a DCT type may be provided as the second encoding parameter **PARB**, means for determining the DCT type by calculating a variance, for example, is omitted from a DCT calculating section 233.

In the illustrated example, the video encoder 230 is supposed to encode the new video signal **SLR** in compliance with the MPEG-2 standard, and is also supposed to perform inter-frame encoding.

09719051 120700

First, the new video signal **SLR**, which has been input to the video encoder **230**, is divided by a blocking section **231** into multiple macroblocks (each consisting of 16×16 pixels). Then, the macroblocks are sequentially input to a motion compensation section **232** one after another. The motion compensation section **232** performs motion compensation on the input macroblocks by using the motion vector included in the second encoding parameter **PARB** that has been provided from the encoding parameter changer **240**. Specifically, the motion compensation section **232** reads out a reference macroblock from a frame memory **238** by using the motion vector and obtains a difference between the reference and input macroblocks, thereby performing the motion compensation. The resultant differential macroblock is input to the DCT calculating section **233**.

15 The DCT calculating section **233** converts the differential macroblock into DCT coefficients on an 8×8 pixel block basis. In this case, the DCT calculating section **233** performs the DCT calculation in accordance with the DCT type included in the second encoding parameter **PARB** that has been provided from the encoding parameter changer **240**. The resultant DCT coefficients are output to a quantizing section **234**, which performs a quantization process on the DCT coefficients. A variable-length encoding section **235** performs a variable-length encoding process on the output of the quantizing section **234** and then outputs the result as the second encoded

25

stream CSB.

Also, the output of the quantizing section 234 is decoded by an inverse quantizing section 236 and an inverse DCT section 237. Subsequently, the decoded data is added to the reference macroblock, which has been read out from the frame memory 238, by an adder 239, and then the sum is stored on the frame memory 238. The data stored will be used as a reference picture when succeeding frames are encoded.

As described above, according to this embodiment, a first encoded stream of an original video signal is decoded and the decoded original video signal is converted into a new video signal through resolution conversion. Also, in parallel with this decoding, a first encoding parameter such as motion vector or DCT type is extracted from the first encoded stream. Next, the first encoding parameter is changed into a second encoding parameter for the new video signal, and the new video signal is converted into a second encoded stream by using this second encoding parameter. Accordingly, there is no need to obtain encoding parameters in encoding the new video signal, thus cutting down the amount of processing considerably. Particularly when motion vectors are used as the encoding parameters, the amount of processing can be reduced very significantly.

In this embodiment, the encoding parameter to be changed is a motion vector or a DCT type. However, the present inven-

tion is implementable similarly even by using any other encoding parameter such as a mode of motion compensation.

Also, the encoding parameter changing method of this embodiment is just an illustrative one. Thus, the conversion
5 may be carried out by any other method. In this embodiment, the encoding parameter for a predetermined area (i.e., macroblock or block) of the new video signal is obtained by using only the encoding parameter for an area of the original video signal that corresponds to the predetermined area. Option-
10 ally, not just the encoding parameter for the area of the original video signal corresponding to the predetermined area, but also encoding parameters for other surrounding areas may be used.

Moreover, in this embodiment, the motion vectors are
15 converted by adopting a weighting and averaging method as a predefined arithmetic operation. Examples of other imaginable and applicable methods include a method of selecting a centroid of a motion vector component, a method of neglecting small motion vector quantities and a method of weighting using
20 predicted errors.

Furthermore, in this embodiment, the same weighting coefficient C_i is used if the macroblock boundaries match before and after the conversion. However, the coefficient does not always have to be the same.

25 Furthermore, in this embodiment, an original video sig-

nal with a high resolution is converted into a new video signal with a low resolution. However, even if a low-resolution original video signal should be converted into a high-resolution new video signal conversely, the encoding parameters may also be changed as in this embodiment.

(Embodiment 4)

FIG. 16 is a block diagram illustrating an overall configuration for an image processing apparatus according to a fourth embodiment of the present invention. As shown in FIG. 16, the image processing apparatus according to this embodiment includes video decoder 310, resolution converter 320, video encoder 330 and motion compensation setter 340.

A first encoded stream **CSA**, which is an encoded stream of an original video signal with a high resolution (i.e., a first resolution), is input. In response, the video decoder 310 decodes the input first encoded stream **CSA** into the original video signal **SHR**. Not just this decoding, the decoder 310 also extracts a motion vector **MV** from the first encoded stream **CSA**. The resolution converter 320 converts the original video signal **SHR** into a new video signal **SLR** with a low resolution (i.e., a second resolution). The motion compensation setter 340 defines settings for the motion compensation, which should be carried out by the video encoder 330, by using the motion vector **MV** of the encoded stream **CSA** that

has been output from the video decoder 310. And the video encoder 330 estimates a second motion vector in accordance with the setting information SET output from the motion compensation setter 340, encodes the new video signal SLR using the second motion vector and then outputs it as a second encoded stream CSB.

The configurations and operations of the video decoder 310 and resolution converter 320 are the same as those of the video decoder 110 and resolution converter 320 according to the second embodiment. Thus, the detailed description thereof will be omitted herein.

Hereinafter, it will be described how the motion compensation setter 340 operates. The motion compensation setter 340 receives the motion vector MV that has been obtained by the video decoder 310 for the original video signal SHR, and obtains the setting information SET for motion compensation to be carried out by the video encoder 330. As the setting information SET, an initial value of motion compensation (i.e., an initial value of the second motion vector) and a range of motion compensation (i.e., a search range for the second motion vector) are determined, for example.

First, it will be described with reference to FIG. 14(b) how the initial value of motion compensation is obtained as the motion compensation setting information SET. In FIG. 14(b), a frame picture is illustrated as having been divided

into multiple macroblocks. As shown in FIG. 14(b), an area for macroblocks MBH1, MBH2, MBH3 and MBH4 in the original video signal is downscaled to an area for a macroblock MBL in the new video signal through the resolution conversion. In this case, the motion compensation setter 340 may obtain the motion vector MVL by the Equation (1) described above, for example, as a motion compensation initial value that will be used by the video encoder 310 in encoding the macroblock MBL. And the setter 340 outputs this motion vector MVL as the motion compensation setting information SET.

Next, it will be described with reference to FIG. 14(b) how the range of motion compensation is determined as the motion compensation setting information SET. In that case, the motion compensation setter 340 determines the motion compensation range, from which the video encoder 330 will have to estimate a motion vector for the macroblock MBL, by using the motion vectors of the macroblocks MBH1 through MBH4. To define the motion compensation range, the maximum absolute values of positive and negative motion vector components of the respective macroblocks MVH1 through MVH4 may be used according to a method, for example. Alternatively, according to another method, the average or variance value of the motion vectors of the respective macroblocks MVH1 through MVH4 may also be used.

In this manner, the motion compensation setter 340 defines the initial value or range for calculating the motion

vector for the new video signal as the motion compensation setting information **SET** by using the motion vector **MV** of the original video signal **SHR**. Then, the setter **340** outputs the value or range to the video encoder **330**.

5 FIG. 17 is a block diagram illustrating an internal configuration for the video encoder **33**. In the illustrated example, the video encoder **330** is supposed to encode the new video signal **SLR** in compliance with the MPEG-2 standard, and is also supposed to perform inter-frame encoding.

10 First, the new video signal **SLR**, which has been input to the video encoder **330**, is divided by a blocking section **331** into multiple macroblocks (each consisting of 16×16 pixels). Then, the macroblocks are sequentially input to a motion compensation section **332** and a motion vector calculator **350** one
15 after another.

The motion vector calculator **350** calculates the second motion vector **MV2** for each of the input macroblocks in accordance with the motion compensation setting information **SET** that has been provided from the motion compensation setter
20 **340**. At this stage, a reference picture is retrieved from a frame memory **338**.

Hereinafter, it will be described with reference to FIG. 18 how the motion vector calculator **350** operates. In FIG. 18, (a) illustrates a frame to be encoded, which is represented by the new video signal **SLR** and has been input from
25

the resolution converter 320, while (b) and (c) illustrate the reference frames that have been read out from the frame memory 338. Suppose a motion vector should be estimated for the macroblock MB1 shown in FIG. 18(a).

5 First, a situation where an initial value of motion compensation has been input as the motion compensation setting information SET will be described with reference to FIG. 18(b). In this case, the motion vector calculator 350 uses the initial value SET, which has been obtained by the motion
10 compensation setter 340, as the initial value of the second motion vector MV2. And an area surrounding the endpoint of the motion vector SET originating from a macroblock MB1 α , which is located at the same position as the macroblock MB1, is defined as a search range SR1 in which the second motion
15 vector MV2 should be estimated. In this search range SR1, the second motion vector MV2 is calculated for the macroblock MB1.

Next, a situation where a range of motion compensation has been input as the motion compensation setting information SET will be described with reference to FIG. 18(c). In that
20 case, the motion vector calculator 350 uses the range SET, which has been obtained by the motion compensation setter 340, as the search range SR2 in which the second motion vector MV2 should be estimated. And in this search range SR2 (i.e., the range SET), the second motion vector MV2 is calculated for the
25 macroblock MB1.

09719051 120700

The motion compensation section 332 performs motion compensation on the input macroblocks by using the second motion vector MV2 provided from the motion vector calculator 350. Specifically, the motion compensation section 332 reads out a reference macroblock from the frame memory 338 by using the second motion vector MV2 and obtains a difference between the reference and input macroblocks, thereby performing the motion compensation. The resultant differential macroblock is input to a DCT calculating section 333.

10 The DCT calculating section 333, quantizing section 334, variable-length encoding section 335, inverse quantizing section 336, inverse DCT calculating section 337 and adder 339 operate in the same way as the counterparts of the second embodiment. Thus, the description thereof will be omitted
15 herein. The second encoded stream CSB is output from the variable-length encoding section 335.

As described above, according to this embodiment, a first encoded stream of an original video signal is decoded and the decoded original video signal is converted into a new video signal through resolution conversion. Also, in parallel with this decoding, a first motion vector that has been used for encoding the original video signal is extracted. Next, motion compensation setting information such as the initial value and range is defined to estimate a second motion vector,
25 which will be used for encoding the new video signal, from the

first motion vector. And in accordance with this setting information, the second motion vector is estimated, thereby encoding the new video signal. As a result, the search range can be much narrowed compared to the prior art, and the amount of motion vector computation can be considerably reduced in encoding a new video signal. Also, since the motion compensation setting information can be obtained from the first motion vector that has been used for encoding the original video signal, the accuracy of motion compensation can be kept high.

Also, the method of defining the motion compensation setting information according to this embodiment is just an illustrative one. Thus, any other method may be used. For example, not just the motion vector for a macroblock of the original video signal corresponding to a predetermined macroblock of the new video signal, but also motion vectors for other macroblocks surrounding the former macroblock may be used. Moreover, in this embodiment, the initial value of the second motion vector is determined by adopting a weighting and averaging method. Examples of other imaginable and applicable methods include a method of selecting a centroid of a motion vector component, a method of neglecting small motion vector quantities and a method of weighting using predicted errors.

Furthermore, the motion compensation setter 340 may define both the initial value and search range of the second

09715051 120700
motion vector as the motion compensation setting information
SET.

Furthermore, in this embodiment, an original video signal with a high resolution is converted into a new video signal with a low resolution. However, even if a low-resolution original video signal should be converted into a high-resolution new video signal conversely, the motion compensation setting information **SET** may also be defined as in the present invention.

10

(Embodiment 5)

FIG. 19 is a block diagram illustrating an overall configuration for an image processing apparatus according to a fifth embodiment of the present invention. As shown in FIG. 19, the image coding apparatus according to this embodiment includes video decoder 410, resolution converter 420, video encoder 430 and system control section 440.

An encoded stream **CSA** of a video signal with a high resolution (i.e., a first resolution) is input. In response, the video decoder 410 decodes the input encoded stream **CSA** into the original video signal **SHR**. The resolution converter 420 converts the decoded original video signal **SHR** into a new video signal **SLR** with a low resolution (i.e., a second resolution). The video encoder 430 encodes the new video signal **SLR** and then outputs it as a second encoded stream **CSB**.

00202T 1506160

The first encoded stream **CSA** is herein supposed to have been encoded in compliance with the MPEG-2. Accordingly, the video decoder **410** is a decoder complying with the MPEG-2 standard. The configuration and operation of the video decoder **410** are the same as those of the video decoder **10** according to the first embodiment. Thus, the detailed description thereof will be omitted herein.

As shown in FIG. 20, the resolution converter **420** converts the original video signal **SHR** into a video signal representing a letterbox picture. In the example illustrated in FIG. 20, the original video signal **SHR** with an aspect ratio of 16:9 as shown in (a) is converted into a new video signal **SLR** with an aspect ratio of 4:3 as shown in (b). If the picture has been converted into the letterbox picture, black-level areas **451** and **452** in the shape of bands are added to the frame picture **450** of the new video signal **SLR** over and under the picture.

FIG. 21 is a block diagram illustrating an internal configuration for the video encoder **430**. As shown in FIG. 21, the video encoder **430** includes area dividing section **431**, blocking section **432**, DCT calculating section **433**, quantizing section **434**, variable-length encoding section **435**, encoded stream generating section **436** and encoded stream storage section **437**. In the illustrated embodiment, the video encoder **430** is supposed to encode the new video signal **SLR** by the

MPEG-2 and is also supposed to perform intra-frame encoding.

On receiving an instruction signal **SI** from the system control section **440**, the area dividing section **431** extracts and outputs an effective data area (i.e., the area **450** except
5 the black-level areas **451** and **452** shown in FIG. 20(b)) from the letterbox picture represented by the new video signal **SLR**. That is to say, the video signal representing the black-level areas **451** and **452** is not output. The blocking section **432** divides the video signal representing the input
10 area **450** into multiple blocks. The DCT calculating section **433** converts the blocked video signal into DCT coefficients. The DCT coefficients, output from the DCT calculating section **433**, are quantized by the quantizing section **434**, converted by the variable-length encoding section **435** into a first en-
15 coded stream **CSB1** and then output to the encoded stream generating section **436**.

On the encoded stream storage section **437**, second encoded streams **CSB2**, which have been obtained by encoding the video signal representing the black-level areas **451** and **452**,
20 are stored in advance. Both intra-frame and inter-frame encoded streams are stored as the second encoded streams **CSB2** on the encoded stream storage section **437**. In the illustrated embodiment, one of the second encoded streams **CSB2** that has been intra-frame encoded is output from the encoded
25 stream storage section **437**.

00719054 120700

The encoded stream generating section 436 combines the first encoded stream CSB1 output from the variable-length encoding section 435 with the second encoded stream CSB2 output from the encoded stream storage section 437. In the illustrated embodiment, these encoded streams are combined sequentially by beginning with the top of the frame. That is to say, the encoded stream representing the black-level area 451 output from the encoded stream storage section 437, the encoded stream representing the area 450 output from the variable-length encoding section 435 and the encoded stream representing the black-level area 452 output from the encoded stream storage section 437 are combined together in this order. The encoded stream combined in this manner is output as the encoded stream CSB.

15 It should be noted that the resolution converter 420 may output the new video signal SLR with the black-level areas 451 and 452 eliminated. In that case, the area dividing section 431 may be omitted from the video encoder 430.

Also, the area dividing section 431 may determine whether the input new video signal SLR represents a letterbox picture or not. In that case, there is no need to externally provide the instruction signal SI to the video encoder 430.

As described above, according to this embodiment, where a new video signal with a letterbox structure, obtained from an original video signal through resolution conversion, is en-

007027 " 15051 120700

coded, no encoding is actually performed on black-level areas thereof but pre-stored encoded streams are combined. Accordingly, there is no need to perform encoding processing on the black-level areas, thus considerably cutting down on the amount of processing. For example, suppose a frame represented by the new video signal has a size of 720 horizontal pixels by 480 vertical pixels and the area other than the black-level areas has a vertical size of 360 pixels. In that case, the amount of processing can be reduced by 25% compared to encoding the entire picture.

In this embodiment, the black-level areas are added over and under the effective data area. Alternatively, at least one black-level area may be added either over or under the data area. Also, the black-level area(s) may be added to various parts other than the upper and lower parts, e.g., on right- and left-hand sides, on the left side only or on the right side only.

Moreover, in this embodiment, the original video signal with an aspect ratio of 16:9 is converted into the new video signal with an aspect ratio of 4:3. However, aspect ratios in any other combination may be used instead.

Furthermore, in this embodiment, an original video signal with a high resolution is converted into a new video signal with a low resolution. However, even if a low-resolution original video signal should be converted into a high-

resolution new video signal, encoding of the black-level areas can also be omitted as in the present invention.

Furthermore, in this embodiment, the video encoder 430 performs intra-frame encoding. But the same statements are
5 applicable to a situation where the video encoder 430 performs inter-frame encoding.

Furthermore, in the foregoing embodiments, the MPEG-2 is used as an exemplary encoding method. Alternatively, any other encoding method like the MPEG-1 or the H.261 is also appli-
10 cable.

CLAIMS

1. An image processing method characterized by comprising:

a decoding step, in which an encoded stream, obtained by encoding an original video signal with a first resolution, is decoded and in which an encoding parameter is extracted from the encoded stream; and

a resolution converting step, in which a characteristic of the original video signal is identified by the encoding parameter and in which the original video signal decoded is converted into a new video signal with a second resolution by a resolution conversion method associated with the characteristic.

2. The image processing method of Claim 1, characterized in that in the resolution converting step, a motion characteristic of a picture represented by the original video signal is identified as the characteristic of the original video signal.

3. The image processing method of Claim 2, characterized in that the encoding parameter comprises at least one of: a motion vector representing a quantity of motion of a video unit; a type of orthogonal transformation to be performed us-

ing either a frame structure or a field structure; and a mode of motion compensation to be performed using either the frame structure or the field structure.

4. The image processing method of Claim 1, characterized in that in the resolution converting step,

a picture represented by the original video signal decoded is divided into a still area and a moving area by using the encoding parameter, and

the original video signal is converted into the new video signal with mutually different resolution conversion methods applied to the still and moving areas.

5. The image processing method of Claim 4, characterized in that the original video signal is an interlaced signal, and

that the resolution conversion is performed on the still area on a frame basis, while the resolution conversion is performed on the moving area on a field basis.

6. The image processing method of Claim 4, characterized in that the encoding parameter is a motion vector representing a quantity of motion of a video unit, and

that the area division is carried out based on a result of comparison between the absolute value of the motion vector

and a predetermined value.

7. The image processing method of Claim 1, characterized in that the encoded stream of the original video signal has been encoded in compliance with an MPEG (Moving Picture Experts Group) standard.

8. The image processing method of Claim 1, characterized in that the first resolution is higher than the second resolution.

9. An image processing apparatus characterized by comprising:

a video decoder for decoding an encoded stream, obtained by encoding an original video signal with a first resolution, and for extracting an encoding parameter from the encoded stream; and

a resolution converter, which receives the original video signal and the encoding parameter that have been output from the video decoder, identifies a characteristic of the original video signal by the encoding parameter and converts the original video signal into a new video signal with a second resolution by a resolution conversion method associated with the characteristic.

10. The image processing apparatus of Claim 9, characterized in that the resolution converter identifies a motion characteristic of a picture represented by the original video signal as the characteristic of the original video signal.

11. The image processing apparatus of Claim 10, characterized in that the encoding parameter comprises at least one of: a motion vector representing a quantity of motion of a video unit; a type of orthogonal transformation to be performed using either a frame structure or a field structure; and a mode of motion compensation to be performed using either the frame structure or the field structure.

12. The image processing apparatus of Claim 9, characterized in that the resolution converter comprises:

an area dividing section for dividing a picture represented by the input original video signal into a still area and a moving area by using the encoding parameter;

a still-area resolution converting section for converting a video signal representing the still area, which has been output from the area dividing section, into the video signal with the second resolution; and

a moving-area resolution converting section for converting a video signal representing the moving area, which has been output from the area dividing section, into the video

signal with the second resolution.

13. The image processing apparatus of Claim 12, characterized in that the original video signal is an interlaced signal, and

that the still-area resolution converting section performs the resolution conversion on a frame basis, and

that the moving-area resolution converting section performs the resolution conversion on a field basis.

14. The image processing apparatus of Claim 12, characterized in that the encoding parameter is a motion vector representing a quantity of motion of a video unit, and

that the area dividing section performs the area division based on a result of comparison between the absolute value of the motion vector and a predetermined value.

15. The image processing apparatus of Claim 9, characterized in that the encoded stream of the original video signal has been encoded in compliance with an MPEG standard.

16. The image processing apparatus of Claim 9, characterized in that the first resolution is higher than the second resolution.

17. An image processing method characterized by comprising:

a decoding step, in which an encoded stream, obtained by encoding an original video signal with a first resolution, is decoded and in which a motion vector is extracted from the encoded stream; and

a resolution converting step, in which the original video signal decoded is converted into a new video signal with a second resolution by using the motion vector extracted.

18. The image processing method of Claim 17, characterized in that the resolution converting step comprises

an area dividing step in which a picture represented by the original video signal decoded is divided into a quasi-still area and a moving area by using the motion vector extracted, and

that the resolution is converted into that of the new video signal by using the extracted motion vector for the quasi-still area and without using the extracted motion vector for the moving area.

19. The image processing method of Claim 18, characterized in that in the area dividing step,

pixel-by-pixel motion vectors with directions similar to that of the extracted motion vector are estimated from the

extracted motion vector, and

an area, in which the pixel-by-pixel motion vectors have been estimated, is regarded as the quasi-still area, while an area, in which none of the vectors has been estimated, is regarded as the moving area.

20. The image processing method of Claim 19, characterized in that in the quasi-still area, the resolution is converted into that of the new video signal by using the pixel-by-pixel motion vectors estimated.

21. The image processing method of Claim 18, characterized in that in the area dividing step,

an area, in which the absolute value of the extracted motion vector is less than a predetermined threshold value, is regarded as the quasi-still area, while an area, in which the absolute value is greater than the threshold value, is regarded as the moving area.

22. The image processing method of Claim 17, characterized in that the encoded stream of the original video signal has been encoded in compliance with an MPEG standard.

23. The image processing method of Claim 17, characterized in that the first resolution is lower than the second

resolution.

24. An image processing apparatus characterized by comprising:

a video decoder for decoding an encoded stream, obtained by encoding an original video signal with a first resolution, and for extracting a motion vector from the encoded stream; and

a resolution converter, which receives the original video signal and the motion vector that have been output from the video decoder and converts the original video signal into a new video signal with a second resolution by using the motion vector.

25. The image processing apparatus of Claim 24, characterized in that the resolution converter comprises:

an area dividing section, which receives the original video signal and the motion vector and divides a picture represented by the original video signal into a quasi-still area and a moving area by using the motion vector;

a quasi-still-area resolution converting section for converting a video signal representing the quasi-still area, which has been output from the area dividing section, into the video signal with the second resolution by using the motion vector; and

a moving-area resolution converting section for converting a video signal representing the moving area, which has been output from the area dividing section, into the video signal with the second resolution without using the motion vector.

26. The image processing apparatus of Claim 25, characterized in that the area dividing section comprises

a motion vector estimating section for estimating, from the motion vector, pixel-by-pixel motion vectors with directions similar to that of the motion vector, and

that an area, in which the pixel-by-pixel motion vectors have been estimated by the motion vector estimating section, is regarded as the quasi-still area, while an area, in which none of the vectors has been estimated, is regarded as the moving area.

27. The image processing apparatus of Claim 26, characterized in that the quasi-still-area resolution converting section converts the resolution by using the pixel-by-pixel motion vectors estimated by the motion vector estimating section.

28. The image processing apparatus of Claim 25, characterized in that the area dividing section regards an area, in

which the absolute value of the motion vector is less than a predetermined threshold value, as the quasi-still area, and also regards an area, in which the absolute value is greater than the threshold value, as the moving area.

29. The image processing apparatus of Claim 24, characterized in that the encoded stream of the original video signal has been encoded in compliance with an MPEG standard.

30. The image processing apparatus of Claim 24, characterized in that the first resolution is lower than the second resolution.

31. An image processing method characterized by comprising the steps of:

decoding a first encoded stream, obtained by encoding an original video signal with a first resolution, and extracting a first encoding parameter from the first encoded stream;

converting the original video signal decoded into a new video signal with a second resolution;

changing the first encoding parameter into a second encoding parameter for use in encoding the new video signal; and

encoding the new video signal using the second encoding parameter, thereby generating a second encoded stream.

32. The image processing method of Claim 31, characterized in that in the step of changing the encoding parameters, the first encoding parameter, which has been used to encode a first area of a picture represented by the original video signal, is changed into the second encoding parameter, which will be used to encode a second area of a picture represented by the new video signal, the second area including part of the picture represented in the first area.

33. The image processing method of Claim 32, characterized in that the first and second encoding parameters are motion vectors.

34. The image processing method of Claim 33, characterized in that in the step of changing the encoding parameters, a value, which has been obtained by performing a predetermined arithmetic operation on the motion vector of the first area, is regarded as the motion vector of the second area.

35. The image processing method of Claim 33, characterized in that in the step of changing the encoding parameters, a weighted average of the motion vectors of the first area is regarded as the motion vector of the second area.

36. The image processing method of Claim 32, character-

ized in that the first and second encoding parameters each represent a type of orthogonal transformation to be performed using either a frame structure or a field structure.

37. The image processing method of Claim 31, characterized in that the first encoded stream has been encoded in compliance with an MPEG standard.

38. The image processing method of Claim 31, characterized in that the second encoded stream is encoded in compliance with an MPEG standard.

39. An image processing apparatus characterized by comprising:

a video decoder for decoding a first encoded stream, obtained by encoding an original video signal with a first resolution, and for outputting a first encoding parameter from the first encoded stream;

a resolution converter for converting the original video signal, which has been output from the video decoder, into a new video signal with a second resolution;

an encoding parameter changer for changing the first encoding parameter, which has been output from the video decoder, into a second encoding parameter for use in encoding the new video signal; and

a video encoder for encoding the new video signal output from the resolution converter by using the second encoding parameter output from the encoding parameter changer, thereby generating a second encoded stream.

40. The image processing apparatus of Claim 39, characterized in that the encoding parameter changer changes the first encoding parameter, which has been used to encode a first area of a picture represented by the original video signal, into the second encoding parameter, which will be used to encode a second area of a picture represented by the new video signal, the second area including part of the picture represented in the first area.

41. The image processing apparatus of Claim 40, characterized in that the first and second encoding parameters are motion vectors.

42. The image processing apparatus of Claim 41, characterized in that the encoding parameter changer regards a value, which has been obtained by performing a predetermined arithmetic operation on the motion vector of the first area, as the motion vector of the second area.

43. The image processing apparatus of Claim 41, charac-

terized in that the encoding parameter changer regards a weighted average of the motion vectors of the first area as the motion vector of the second area.

44. The image processing apparatus of Claim 40, characterized in that the first and second encoding parameters each represent a type of orthogonal transformation to be performed using either a frame structure or a field structure.

45. The image processing apparatus of Claim 39, characterized in that the first encoded stream has been encoded in compliance with an MPEG standard.

46. The image processing apparatus of Claim 39, characterized in that the second encoded stream is encoded in compliance with an MPEG standard.

47. An image processing method characterized by comprising the steps of:

decoding a first encoded stream, obtained by encoding an original video signal with a first resolution, and extracting a first motion vector from the first encoded stream;

converting the original video signal decoded into a new video signal with a second resolution;

defining setting information based on the first motion

vector to estimate a second motion vector for use in encoding the new video signal;

estimating the second motion vector in accordance with the setting information defined; and

encoding the new video signal using the second motion vector estimated, thereby generating a second encoded stream.

48. The image processing method of Claim 47, characterized in that an initial value of the second motion vector is determined as the setting information.

49. The image processing method of Claim 47, characterized in that a search range in which the second motion vector is estimated is determined as the setting information.

50. The image processing method of Claim 47, characterized in that the first encoded stream has been encoded in compliance with an MPEG standard.

51. The image processing method of Claim 47, characterized in that the second encoded stream is encoded in compliance with an MPEG standard.

52. An image processing apparatus characterized by comprising:

0025031 120700

a video decoder for decoding a first encoded stream, obtained by encoding an original video signal with a first resolution, and for extracting a first motion vector from the first encoded stream;

a resolution converter for converting the original video signal, which has been output from the video decoder, into a new video signal with a second resolution;

a motion compensation setter for generating setting information based on the first motion vector, which has been output from the video decoder, to estimate a second motion vector for use in encoding the new video signal; and

a video encoder for estimating the second motion vector in accordance with the setting information generated by the motion compensation setter and encoding the new video signal, which has been output from the resolution converter, using the second motion vector estimated, thereby generating a second encoded stream.

53. The image processing apparatus of Claim 52, characterized in that the motion compensation setter determines an initial value of the second motion vector as the setting information.

54. The image processing apparatus of Claim 52, characterized in that the motion compensation setter determines a

search range, in which the second motion vector is estimated, as the setting information.

55. The image processing apparatus of Claim 52, characterized in that the first encoded stream has been encoded in compliance with an MPEG standard.

56. The image processing apparatus of Claim 52, characterized in that the second encoded stream is encoded in compliance with an MPEG standard.

57. An image processing method characterized by:
converting an original video signal having a first resolution into a new video signal having a second resolution and a black-level area in part of its picture;

encoding the new video signal except the black-level area thereof, thereby generating a first encoded stream; and

combining a second encoded stream, obtained by encoding the black-level area of the video signal, with the first encoded stream, thereby generating an encoded stream for the new video signal.

58. An image processing method characterized by:
converting an original video signal having a first resolution into part of a new video signal, the new video signal

having a second resolution and a black-level area in the other part of its picture;

encoding the video signal, thereby generating a first encoded stream; and

combining a second encoded stream, obtained by encoding the black-level area of the video signal, with the first encoded stream, thereby generating an encoded stream for the new video signal.

59. The image processing method of Claim 57 or 58, characterized in that the encoding is performed in compliance with an MPEG standard.

60. An image processing apparatus characterized by comprising:

a resolution converter for converting an original video signal having a first resolution into a new video signal having a second resolution and a black-level area in part of its picture; and

a video encoder for encoding the new video signal except the black-level area thereof to generate a first encoded stream and combining a second encoded stream, obtained by encoding the black-level area of the video signal, with the first encoded stream, thereby generating an encoded stream for the new video signal.

61. An image processing apparatus characterized by comprising:

a resolution converter for converting an original video signal having a first resolution into part of a new video signal, the new video signal having a second resolution and a black-level area in the other part of its picture; and

a video encoder for encoding the video signal to generate a first encoded stream and combining a second encoded stream, obtained by encoding the black-level area of the video signal, with the first encoded stream, thereby generating an encoded stream for the new video signal.

62. The image processing apparatus of Claim 60 or 61, characterized in that the video encoder performs the encoding in compliance with an MPEG-2 standard.

ABSTRACT

A video decoder 10 not only decodes an encoded stream CS to generate an original video signal SHR with a first resolution but also extracts an encoding parameter PAR such as motion vector or type of orthogonal transformation from the encoded stream CS. A resolution converter 20 recognizes a characteristic of the original video signal SHR by the encoding parameter PAR, and converts the original video signal SHR into a new video signal SLR with a second resolution by a resolution conversion method associated with the characteristic.

FIG. 1

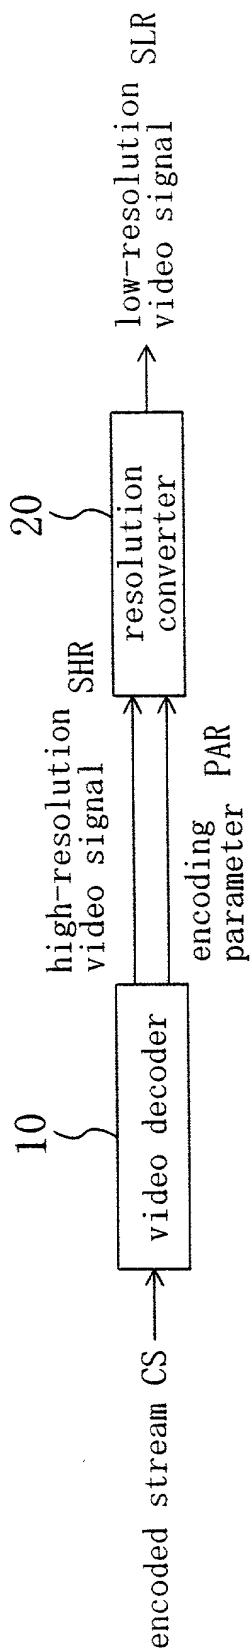


FIG. 2

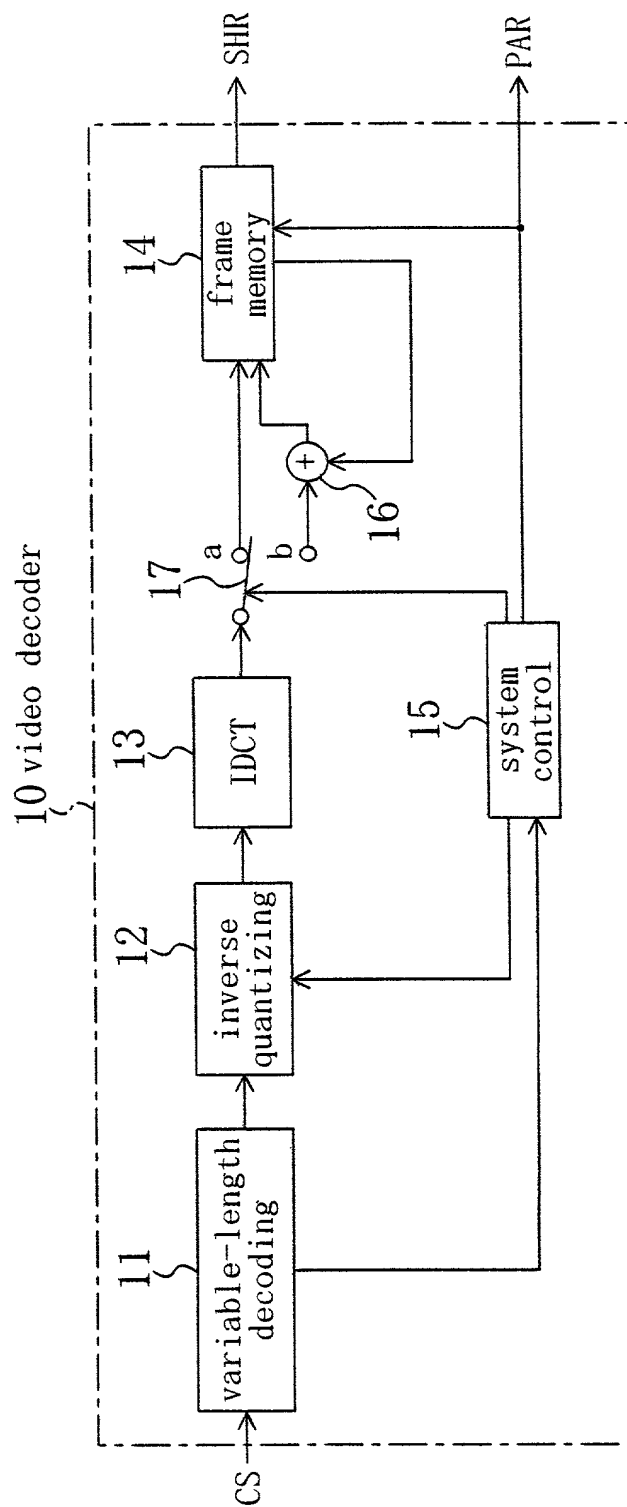


FIG. 3


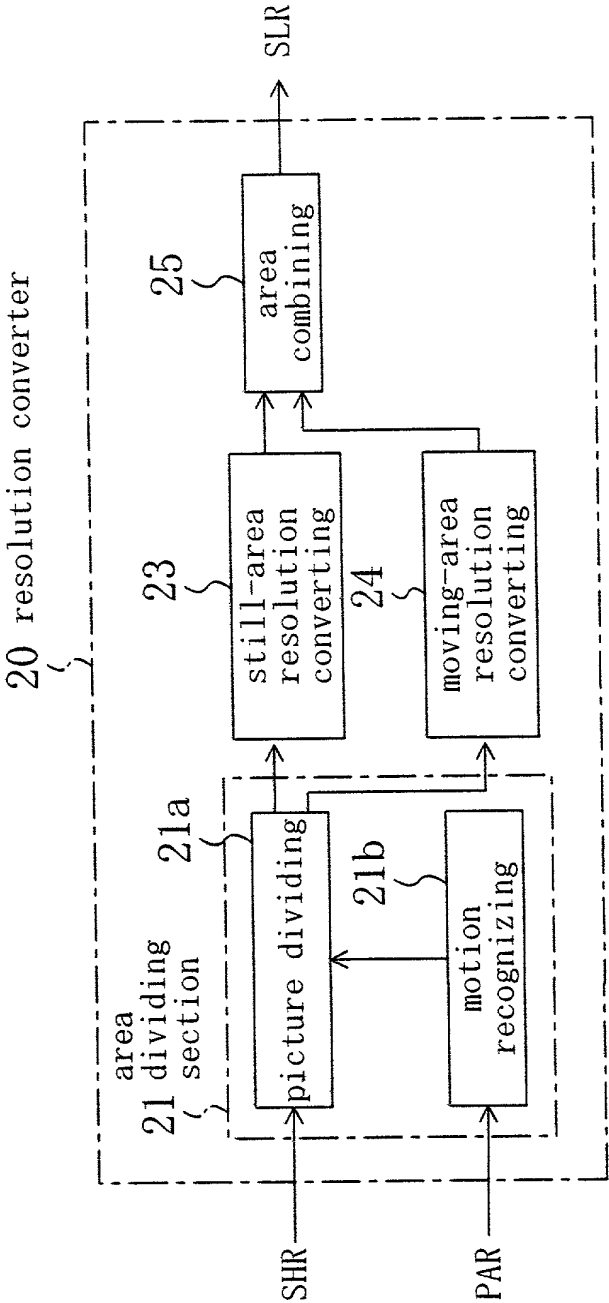


FIG. 4A


macroblock (16×16)

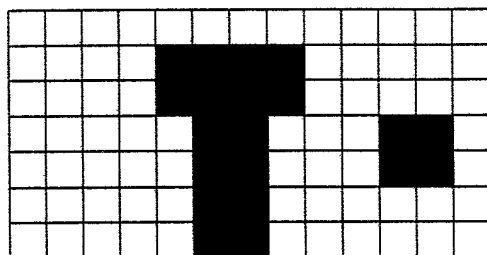

■ moving area
□ still area

FIG. 4B

block (8×8)

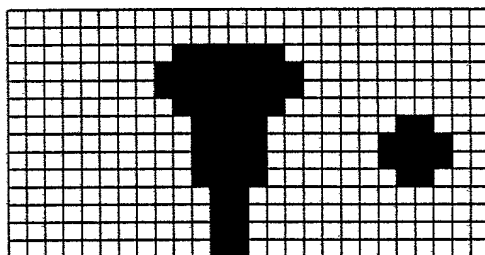

■ moving area
□ still area

FIG. 5A



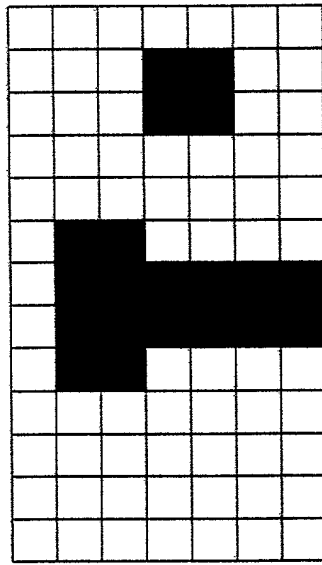


FIG. 5B



still
area \rightarrow

FIG. 5C

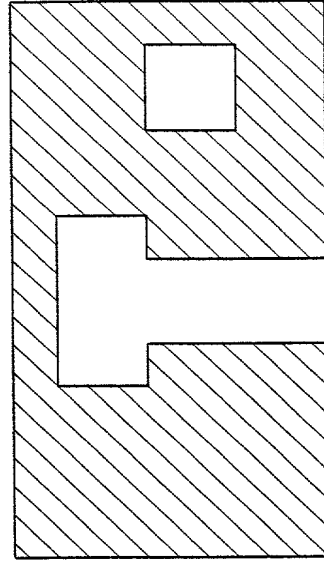

moving area

FIG. 6A


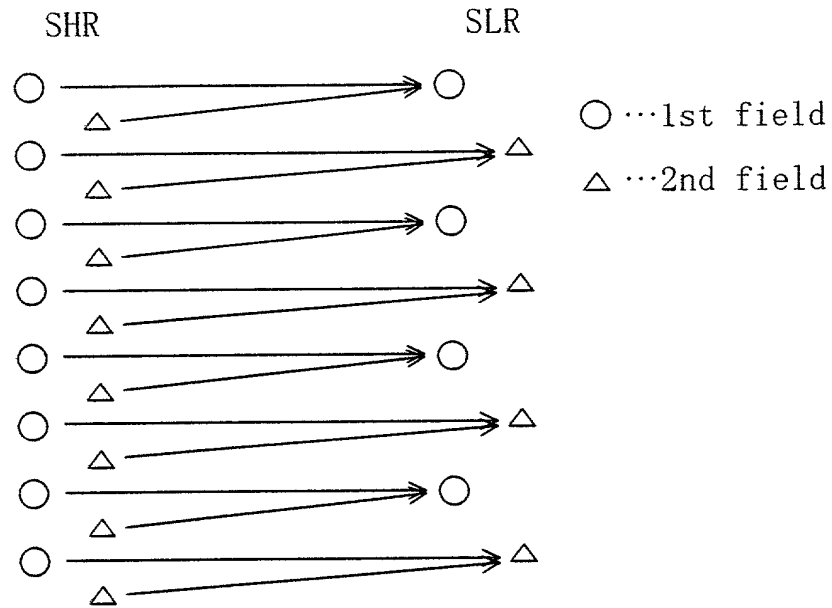


FIG. 6B

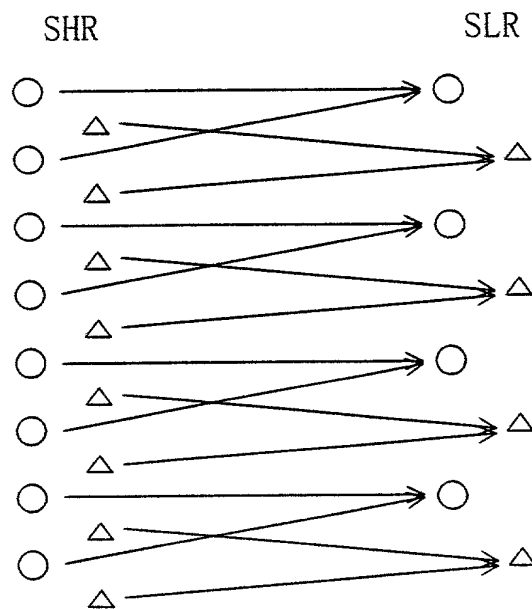

00/0027 75067/60

FIG. 7A

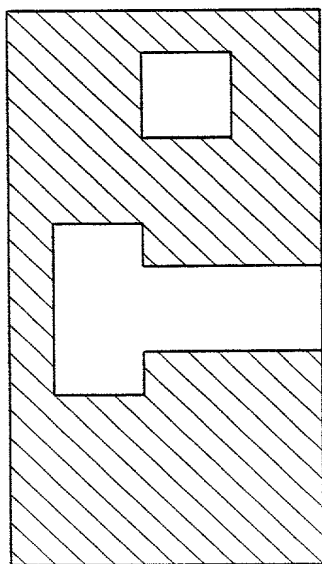


FIG. 7C




FIG. 7E




FIG. 7B



FIG. 7D

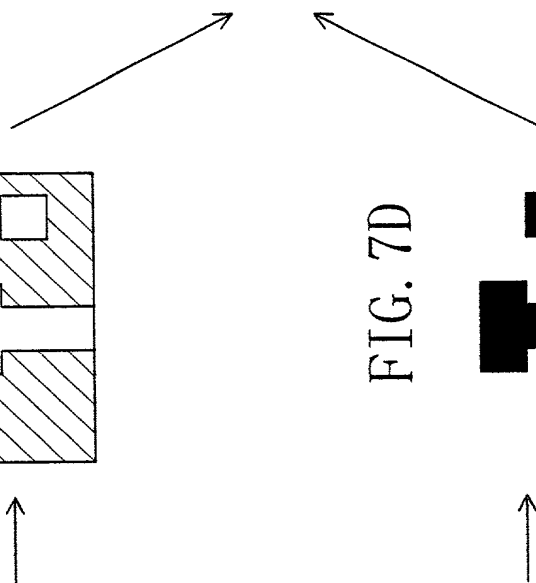


FIG. 8

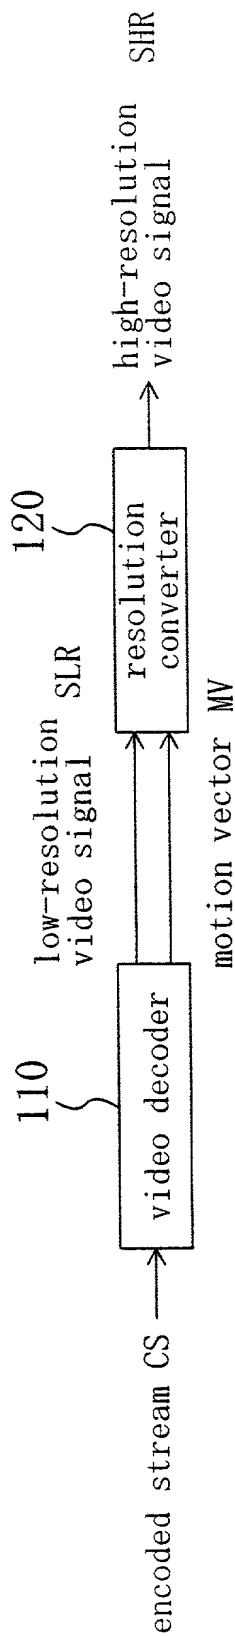


FIG. 9

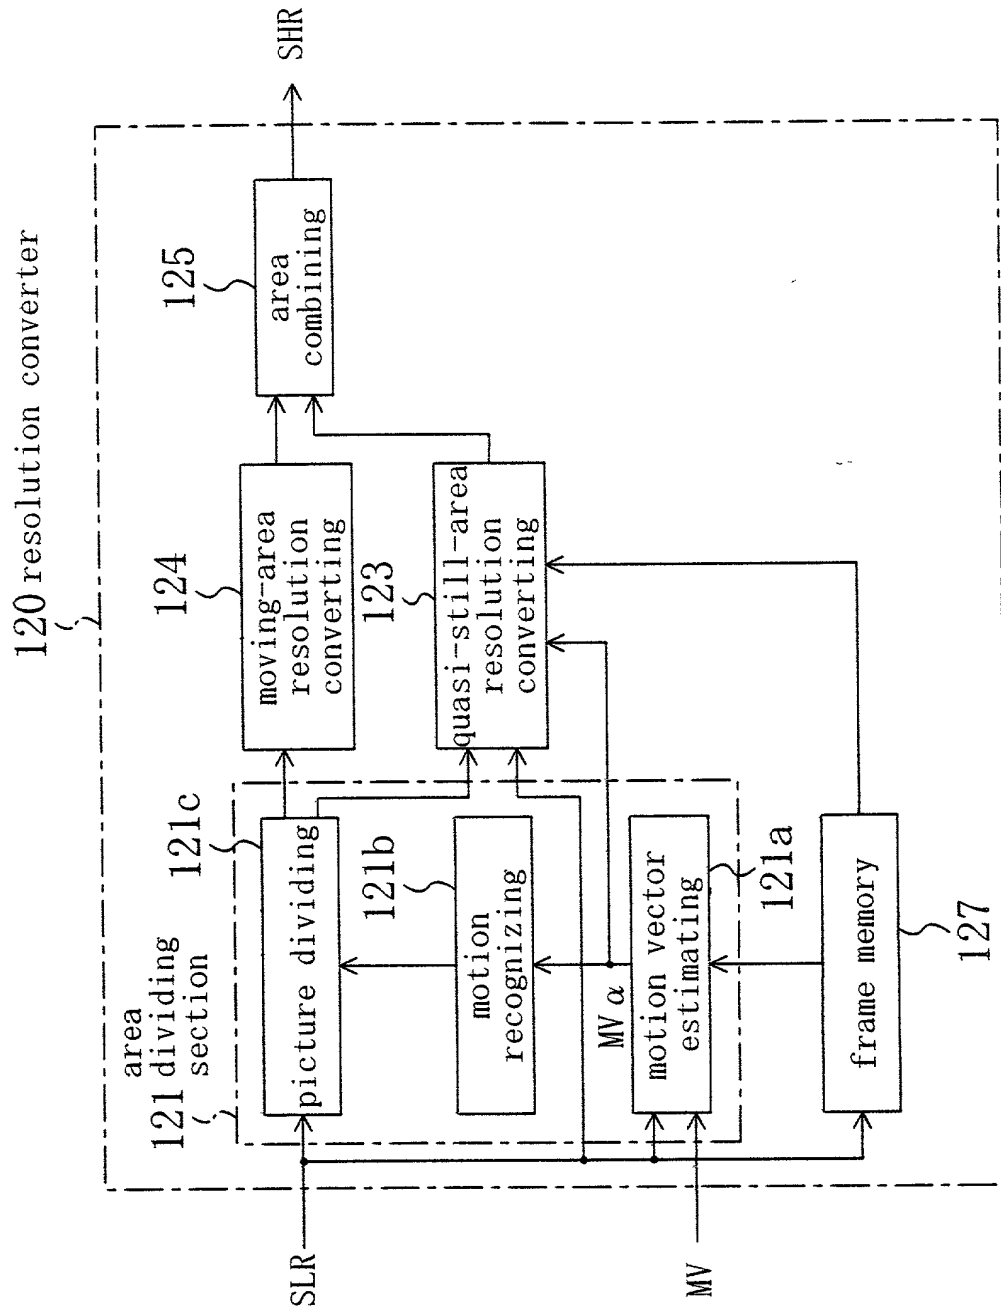


FIG. 10

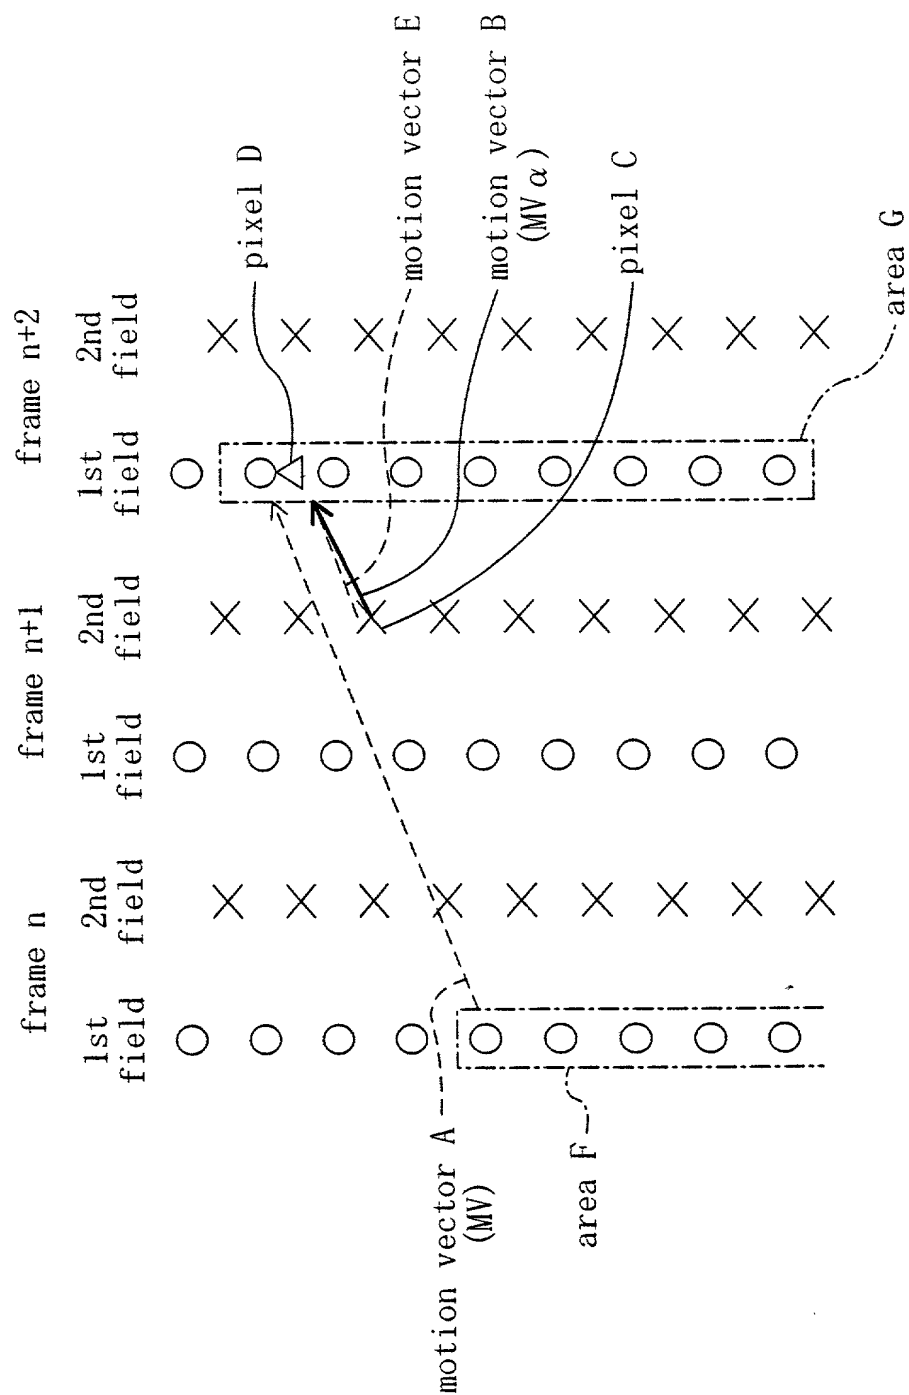


FIG. 11

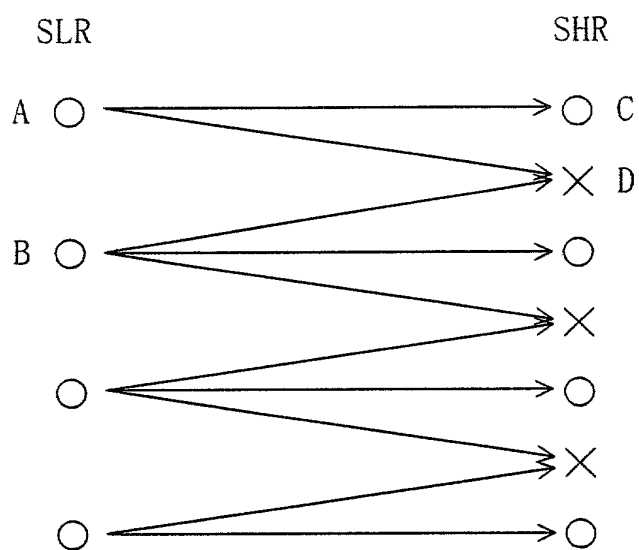


FIG. 12

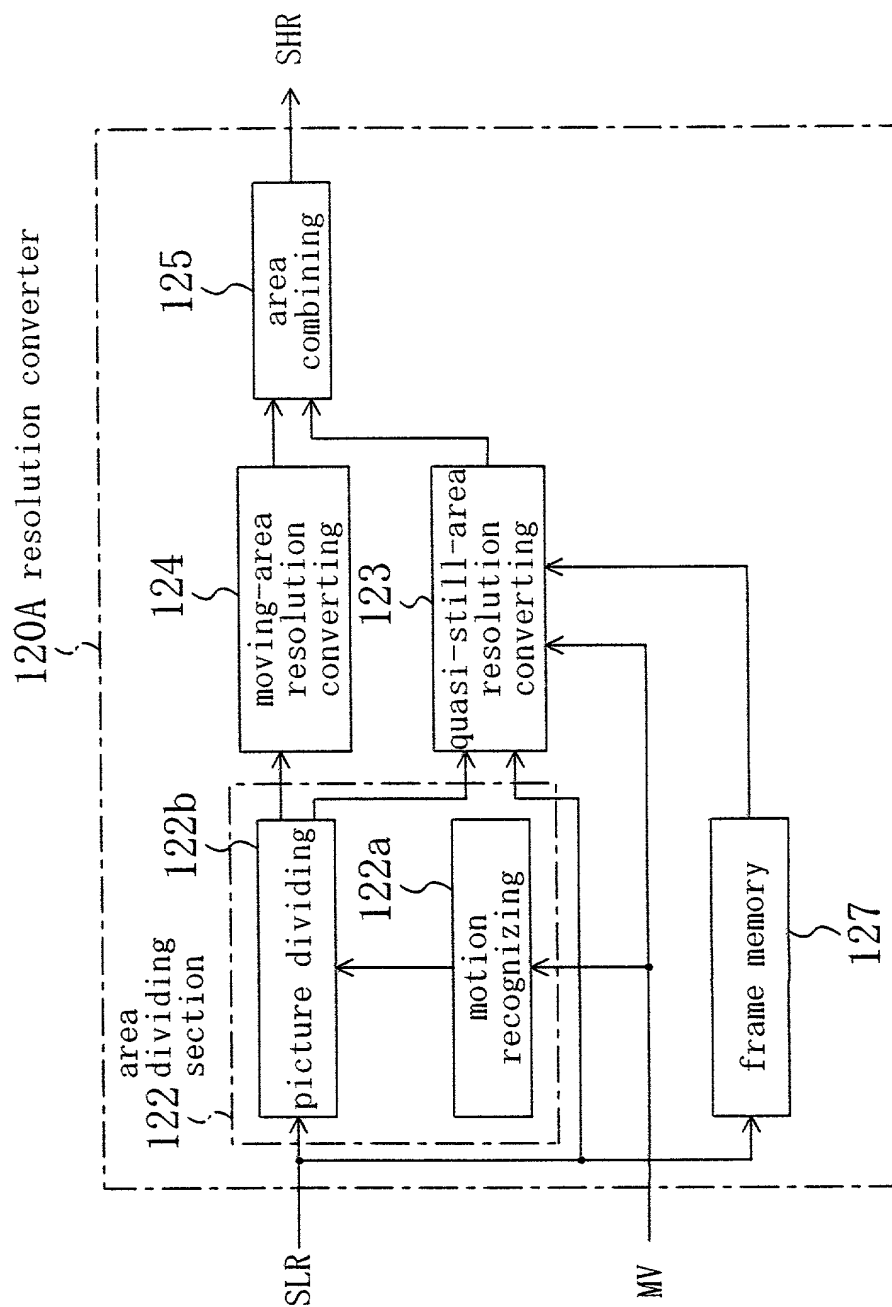


FIG. 14A

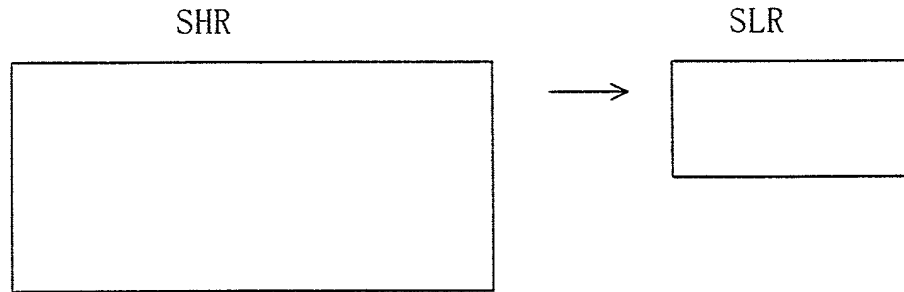


FIG. 14B

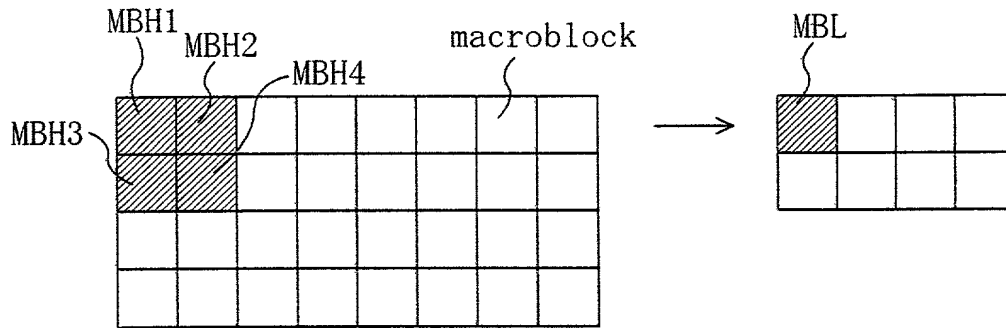


FIG. 14C

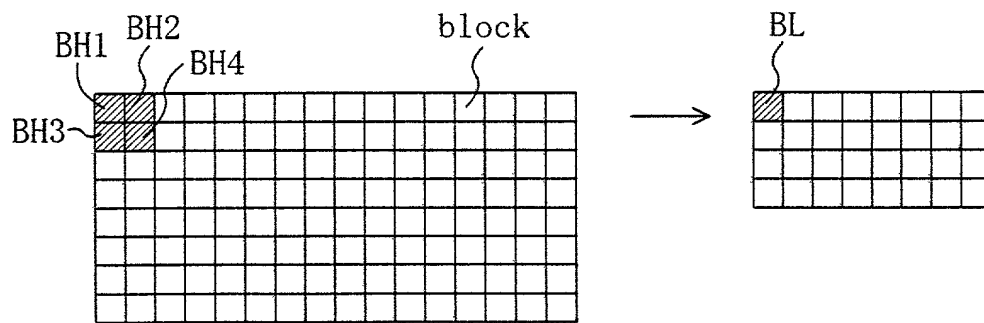


FIG. 15

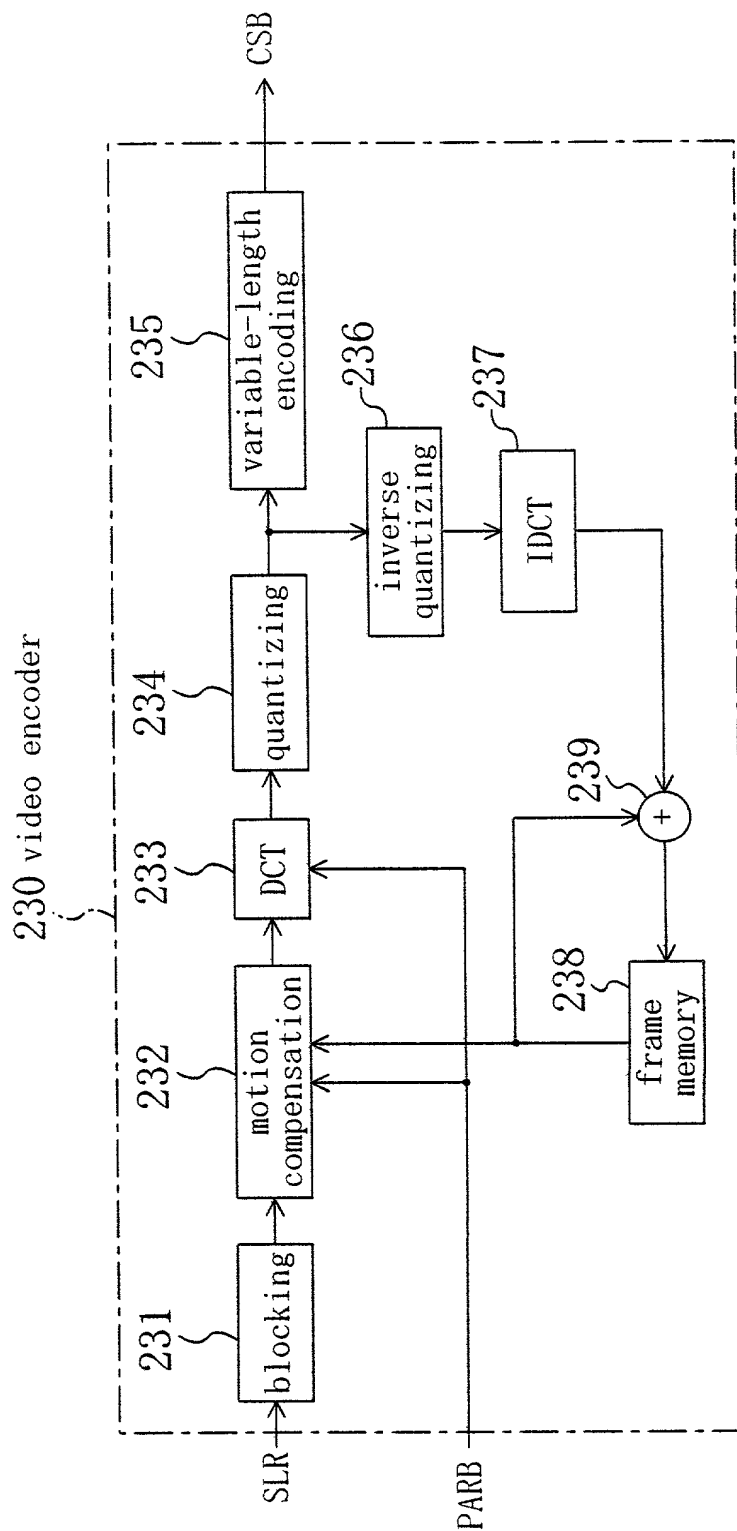


FIG. 17

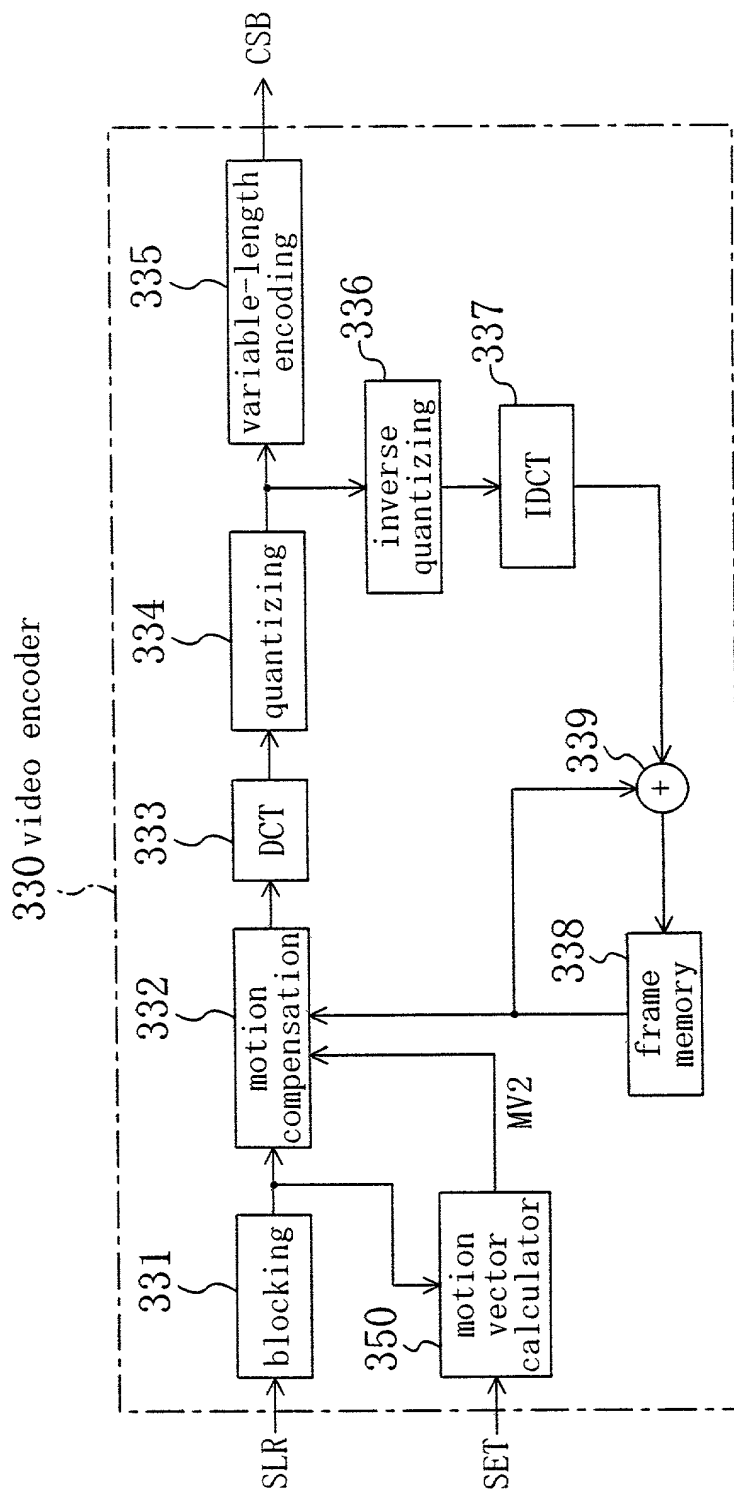


FIG. 18A

frame to
be encoded

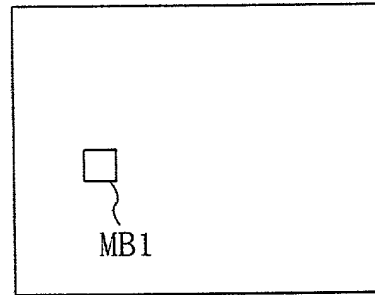


FIG. 18B

reference
frame

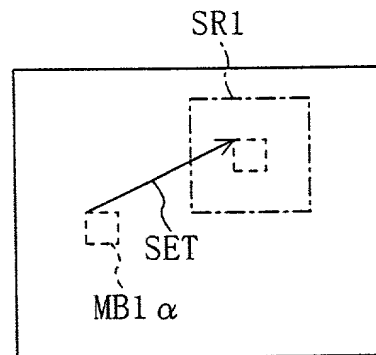


FIG. 18C

reference
frame

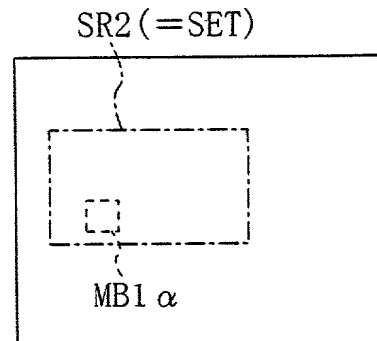


FIG. 19


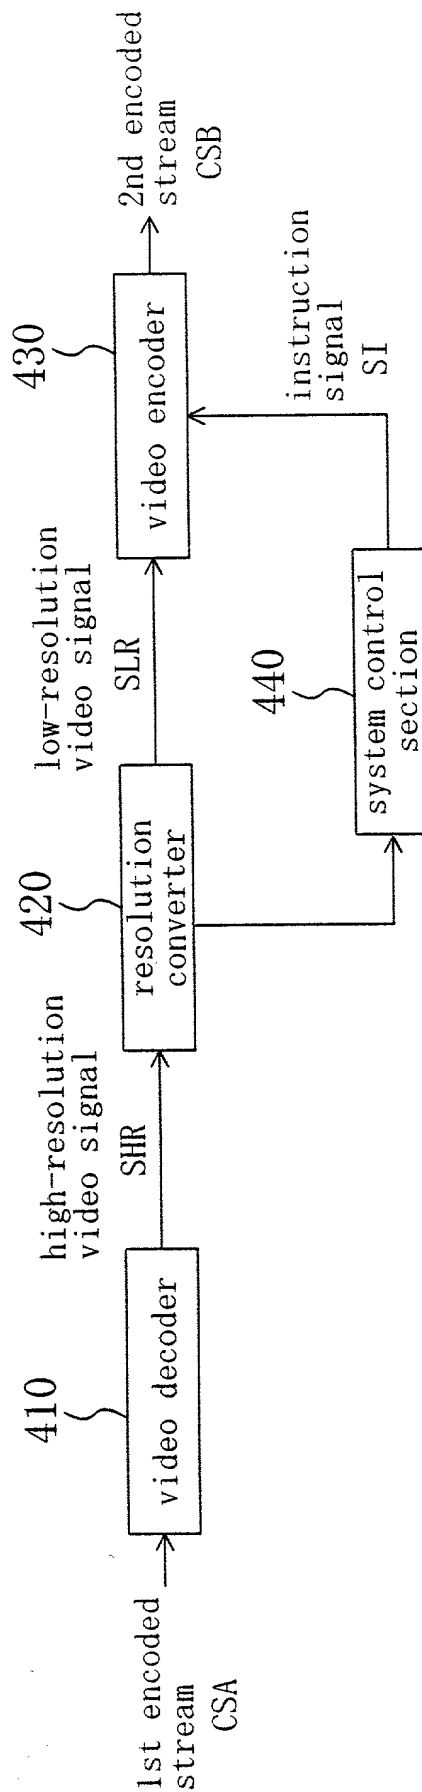


FIG. 20A

high-resolution video signal (16:9)

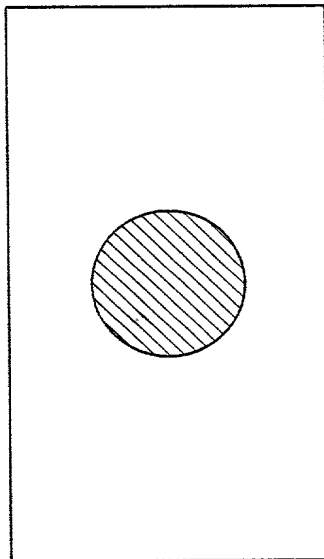

resolution
conversion
→

FIG. 20B

low-resolution video signal (4:3)

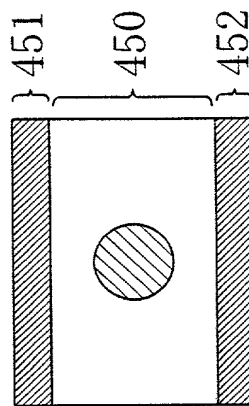


FIG. 21

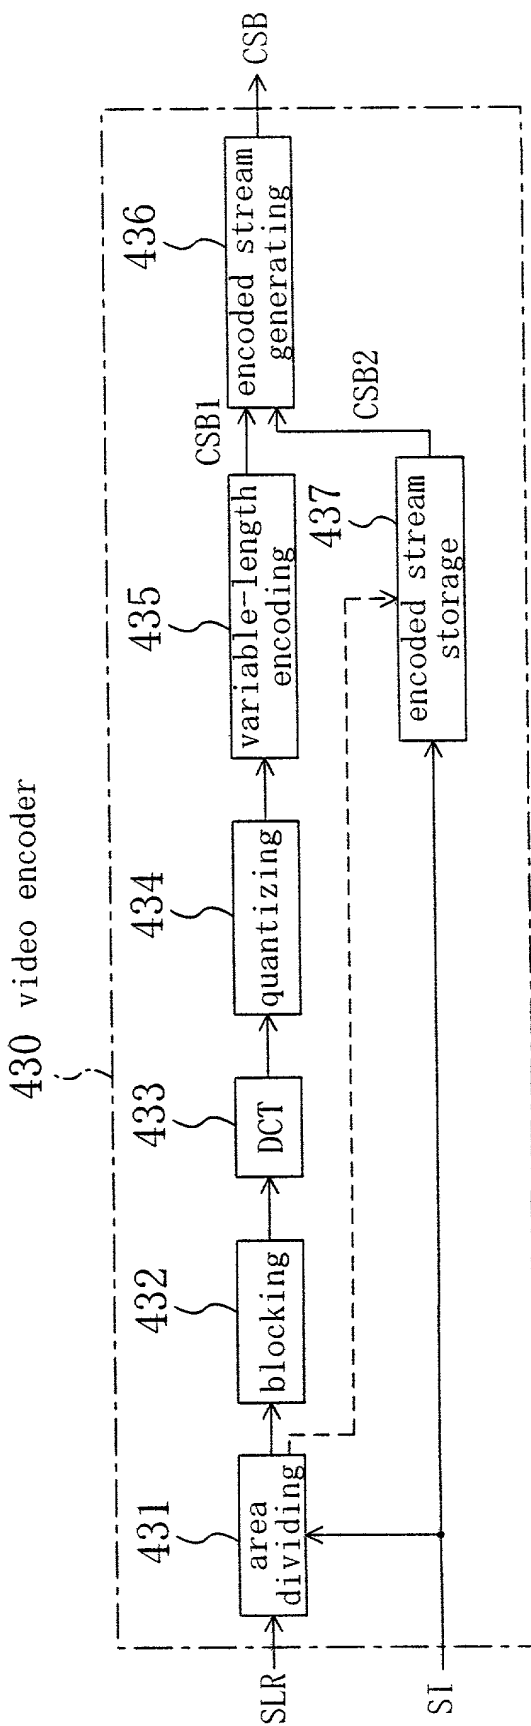


FIG. 22

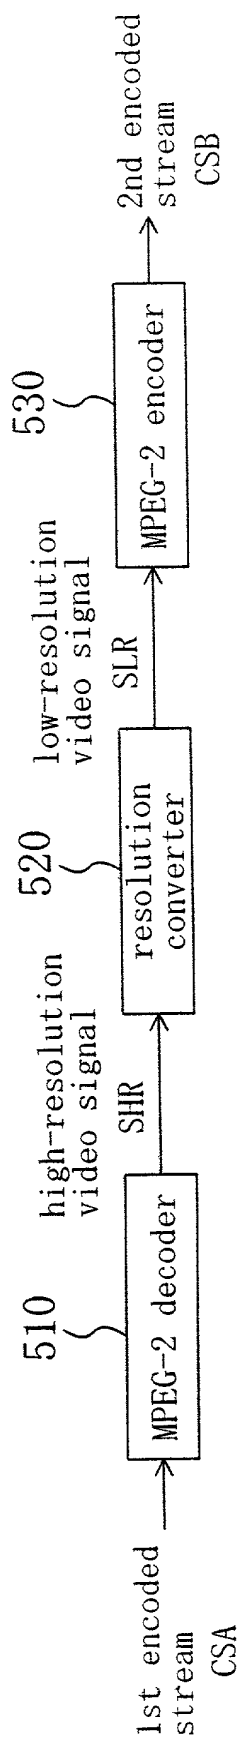


FIG. 23A

frame of
high-resolution
video signal

FIG. 23B

frame of
low-resolution
video signal

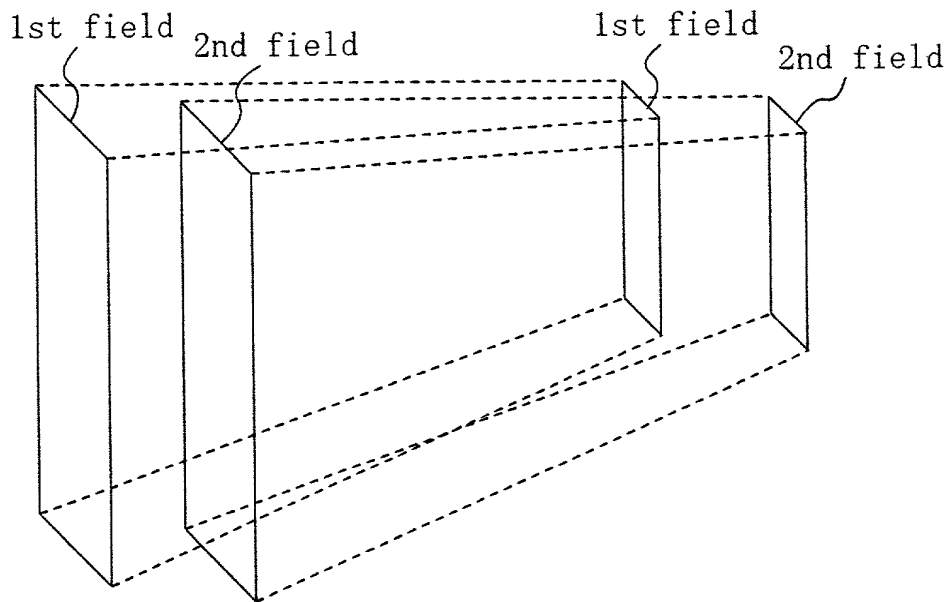


FIG. 24A

high-resolution video signal
(16:9)




FIG. 24B

low-resolution video signal
(4:3, letterbox)






FIG. 24C

low-resolution video signal
(4:3, squeeze)

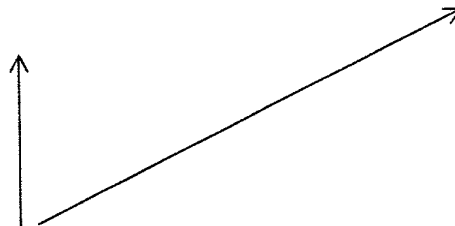

COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY

(Includes Reference to PCT International Applications)

Attorney Docket No:

I hereby claim the benefit under Title 35, United States Code, § 119(e) or § 120, as applicable of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120:

U.S. APPLICATIONS		STATUS (Check one)		
U.S. APPLICATION NUMBER	U.S. FILING DATE	PATENTED	PENDING	ABANDONED
PCT APPLICATIONS DESIGNATING THE U.S.				
PCT APPLICATION NO.	PCT FILING DATE	U.S. SERIAL NUMBERS ASSIGNED (if any)		

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (List name and registration number)

Daniel W. Sixbey, (Reg. No. 20,932)
Charles M. Leedom, Jr. (Reg. No. 26,477)
David S. Safran (Reg. No. 27,997)
Donald R. Studebaker (Reg. No. 32,815)
Tim L. Brackett (Reg. No. 36,092)
Robert M. Schulman (Reg. No. 31,196)

Stuart J. Friedman (Reg. No. 24,312)
Gerald J. Ferguson, Jr. (Reg. No. 23,016)
Thomas W. Cole (Reg. No. 28,290)
Jeffrey L. Costellia (Reg. No. 35,483)
Eric J. Robinson (Reg. No. 38,285)
Thomas M. Blasey (Reg. No. 33,475)





Send Correspondence to: Nixon Peabody LLP
8180 Greensboro Drive, Suite 800
McLean, Virginia 22102

Direct Telephone Calls to:
(name and telephone number)

Eric J. Robinson
(703) 790-9110

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

The undersigned hereby authorize any U.S. attorney or agent named herein to accept and follow instructions from _____ as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorneys or agents named herein will be so notified by the undersigned.

FULL NAME OF SOLE OR FIRST INVENTOR Satoshi KONDO	INVENTOR'S SIGNATURE 	DATE December 4, 2000
RESIDENCE (City, State & Country) Kyoto, Japan 		CITIZENSHIP Japan
POST OFFICE ADDRESS (Complete Address including City, State & Country) 7-17, Otokoyama-shigetsu, Yawata-shi, Kyoto 614-8361, Japan		

COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY

(includes Reference to PCT International Applications)

Attorney Docket No:

As a below named inventor, I hereby declare that:

My residence post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

*** IMAGE PROCESSING METHOD AND IMAGE PROCESSING APPARATUS**

the specification of which (check only one item below):

☐ is attached hereto.

☐ was filed as United States application

Serial No.

on

and was amended

on _____ (if applicable).

☒ was filed as PCT international application

Number **PCT/IP00/02308**

on **April 7, 2000**

and was amended under PCT Article 19

on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations. § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate or of any PCT international applications(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:

COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 USC 119
Japan	11-101044	08/04/1999	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO